



ESTABLISHED OVER

25
years

PRODUCT RANGE

VOLUME 11



The world's most trusted gate hardware





D&D Technologies

World's most trusted gate hardware



D&D Technologies – the world’s leading innovator and manufacturer

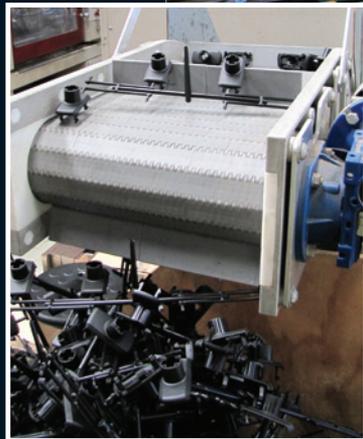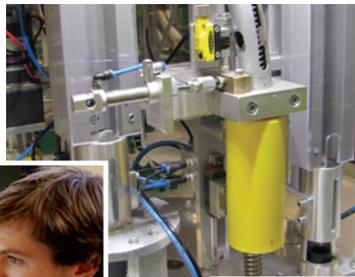

INNOVATION • QUALITY & VALUE • ADVANCED ENGINEERING & MATERIALS • GLOBAL PARTNERS

You know us best as the proud inventors of...

MAGNETIC GATE LATCHES

In the early 1990s D&D invented the MagnaLatch® Child Safety Gate Latch. These super-reliable, magnetically triggered devices revolutionized child safety around swimming pools, childcare centers, homes and businesses. Over 25 years, millions of D&D's MagnaLatches have been installed on gates around the world, assisting in saving countless children's lives and making generations of families safer.

POLYMER GATE HARDWARE

The immediate success of MagnaLatch® inspired D&D to find a solution to the fencing industry's problem of latches and hinges that would rust, bind and sag. D&D's engineers invented the world's first polymer gate hardware, including the TruClose® range of safety gate hinges and a host of other gate latches. Constructed of engineering polymer and rust-free stainless steel components, TruClose® hinges are enthusiastically accepted due to their strength, reliability and ease of adjustment.

GATE CLOSURE - A HINGE & CLOSER ALL-IN-ONE

The introduction of our SureClose® range of hydraulic gate hinges and closers proved a boon to heavy and high-traffic gates. With these sturdy and compact aluminum devices, the fencing industry finally had the dependable gate hinge-closers they were looking for. The result is a stylish range of quality hinge-closers to fit all types of residential and commercial-style gates.

THE WORLD'S FIRST COMBINED LATCH & ALARM

D&D's latest ground-breaking innovation is the MagnaLatch® ALERT Gate Latch-Alarm. This is the world's first and only combined safety gate latch and alarm. We combined all the best attributes of our MagnaLatch®, including the world first product safety traceability, with a dual-alarm system (sight and sound alerts) that significantly raises the bar for gate safety. The range offers the highest level of safety and peace-of-mind around pools, homes, childcare centers, schools and businesses.

of premium gate latches, locks and hinges



• VALUE-ADDED CUSTOMER SERVICE & SUPPORT

AWARDS, MEMBERSHIPS & AFFILIATIONS



www.ddtechglobal.com

Contents

Selection Guide

Latches & Locks.....	4
Hinges.....	6

Latches & Locks

MagnaLatch® ALERT	8
MagnaLatch® Series 3.....	12
MagnaLatch® Side Pull.....	14
T-Latch™.....	15
LokkLatch® MAGNETIC.....	16
LokkLatch® DELUXE.....	18
LokkLatch® REGULAR & LokkLatch® ROUND.....	20
LokkLatch® PRO.SL.....	22

Self-closing Hinges

TruClose® Series 3.....	24
TruClose® MultiAdjust.....	28
TruClose® Mini MultiAdjust.....	29
TruClose® Round.....	30
DecoMold™.....	31

Hydraulic Closers & Hinges

SureClose® READYFIT.....	32
SureClose® FLUSH & CENTER MOUNT.....	34
SureClose® EASY.....	36

KwikFit Hinges

KwikFit™ Aluminum.....	38
KwikFit™ Polymer.....	40

Gate Extras

GateStop™.....	41
GateHandle™.....	41

Drop Bolts

LokkBolt®.....	42
Q-Bolt™.....	43

Glass Range

Vizage™.....	44
Vizage™ Kits.....	46

Dimensions

Specifications & measurements.....	48
------------------------------------	----

Choosing your latch or lock



**MagnaLatch® ALERT
Top Pull (p.8)**



**MagnaLatch® ALERT
Vertical Pull (p.10)**



**MagnaLatch® Series 3
Top Pull (p.12)**



**MagnaLatch® Series 3
Vertical Pull (p.12)**



**MagnaLatch® Lockable
Side Pull (p.14)**



T-Latch™ (p.15)



**LokkLatch®
MAGNETIC (p.16)**

GATE PRODUCT	GATE MATERIAL	LOCK TYPE/ REKEYABLE	IDEAL GATE GAP	GAP VARIANCE	VERTICAL ADJUSTMENT	LOCKS OR OPERATES FROM BOTH SIDES OF THE GATE
MagnaLatch® Series 3 Top Pull & MagnaLatch® ALERT latch-alarm Magnetic child safety gate latch, and deluxe model with electronic visual and audible alarms. Key lockable.	Metal, Wood, Vinyl, Chainlink	6-Pin/Yes	¾" 19mm	½" - 1 ½" 13-38mm	1 ½" 38mm	No
MagnaLatch® Series 3 Vertical Pull & MagnaLatch® ALERT latch-alarm Magnetic front, side and pet safety gate latch, and deluxe model with electronic visual and audible alarms. Lockable.	Metal, Wood, Vinyl, Chainlink	6-Pin/Yes	¾" 19mm	½" - 1 ½" 13-38mm	¾" 19mm	No
MagnaLatch® Side Pull Lockable General-purpose magnetic gate latch for many gates around homes and gardens. Key-lockable.	Metal, Wood, Vinyl	Wafer/No	⅜" 10mm	⅝" - 11/16" 7-17mm	⅜" 10mm	No
T-Latch® Toggle-style gravity latch with floating latch bolt. Automatically compensates for gate sag.	Metal, Wood, Vinyl	Use Padlock	¾" 19mm	⅜" - 1 ¾" 10-44mm	½" 13mm	No
LokkLatch® MAGNETIC Magnetic gate lock with one-handed push/pull operation and optional decorative trim covers.	Metal, Wood, Vinyl	6-Pin/Yes	¾" 19mm	⅜" - 1 ¼" 10-32mm	½" 13mm	Yes
LokkLatch® DELUXE Privacy & Security gate latch that locks and unlocks from both sides of the gate. Can be rekeyed to doors.	Metal, Wood, Vinyl	6-Pin/Yes	1" 25mm	⅝" - 1 ½" 16-38mm	½" 13mm	Yes
LokkLatch® Regular Lockable gravity latch for general-purpose gates around homes and gardens. Wafer keyed.	Metal, Wood, Vinyl	Wafer/No	¾" 19mm	⅜" - 1 ⅜" 10-35mm	½" 13mm	Yes with External Access Kit (EAK)
LokkLatch® ROUND POST Lockable gravity latch for round-posted gates and fences. Includes various adaptors for Chainlink diameters.	Chainlink	Wafer/No	1 ½" 38mm	1" - 2" 25-50mm	½" 13mm	Yes
LokkLatch® PRO.SL Spring triggered gate latch that locks automatically. Requires key to enter and exit.	Metal, Wood, Vinyl	6-Pin/Yes	¾" 19mm	½" - 1 ½" 13-38mm	⅜" 10mm	Yes



Check your latch applications



LokkLatch® DELUXE (p.18)



LokkLatch® (p.20)



LokkLatch® PRO.SL (p.22)

METAL	WOOD	VINYL	CHAINLINK	SAFETY GATES	PEDESTRIAN GATES	PRIVACY GATES	DOUBLE DRIVE	AVAILABLE IN WHITE †
•	•	•	•*	•**	•		•	
•	•	•	•*	•**	•			
•	•	•		•**	•			•†
•	•	•			•		•	
•	•	•			•	•	•	
•	•	•			•	•	•	•†
•	•	•			•		•	•†
			•		•			
•	•	•			•	•		•†

*Using Round Post Adaptor Kit. **Check local pool barrier guidelines for proper installation methods. †White not available in AU/NZ

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

Choosing your hinges...

TRUClose The industry's best-performing hinges



	PRODUCT CODE	TRIM COVER OPTIONS	GATE MATERIAL	IDEAL GATE GAP	GAP VARIANCE	MAXIMUM SELF-CLOSING WEIGHT*	ALIGNMENT LEGS
TRUCLOSE REGULAR RANGE	TCA1S3	Black, Brushed, Chrome, White	Metal	¾" 19mm	¼" - ⅞" 6-22mm	66 lb 30kg	Optional
	TCA2S3	Black, Brushed, Chrome	Metal, Wood	¾" 19mm	¼" - ⅞" 6-22mm	66 lb 30kg	Optional
	TCA3S3	Black, Brushed, Chrome, White	Wood, Vinyl	¾" 19mm	¼" - ⅞" 6-22mm	66 lb 30kg	Optional
	TCA4	NA	Wood	¾" 19mm	¼" - ⅞" 6-22mm	55 lb 25kg	No
	TCAMA1	NA	Metal, Wood, Vinyl	1 ⅛" 29mm	⅞" - 1½" 22-38mm	55 lb 25kg	Yes
	TCAMA2	NA	Metal, Wood, Vinyl	1 ⅜" 35mm	⅞" - 2" 22-50mm	55 lb 25kg	Yes
TRUCLOSE HEAVY DUTY RANGE	TCHD1AS3	Black, Brushed, Chrome, White	Metal	¾" 19mm	¼" - 1" 6-25mm	154 lb 70kg	Optional
	TCHDIS3	Black, Brushed, Chrome	Metal, Wood, Vinyl	¾" 19mm	¼" - 1" 6-25mm	154 lb 70kg	Optional
	TCHD2L1SS3	Black, Brushed, Chrome, White	Wood, Vinyl	¾" 19mm	¼" - 1" 6-25mm	154 lb 70kg	Yes
	TCHD2L2S3	Black, Brushed, Chrome, White	Wood, Vinyl	¾" 19mm	Fixed at ¾" (19mm)	154 lb 70 kg	Yes
	TCHDMA1	NA	Metal, Wood, Vinyl	1" 25mm	⅝" - 1 ⅜" 16-35mm	132 lb 60kg	Yes
	TCHDRND1/2	NA	Chainlink	1" 25mm	¾" - 1⅜" 19-35mm	132 lb 60kg	Yes

*Ratings are based upon two hinges on a maximum gate size of:
Regular hinges: 5'H x 3'W (1500mmH x 900mmW) , Heavy Duty hinges: 6'H x 4'W (1800mmH x 1200mmW)



Choosing your hinges...

DD SUREClose® Hydraulic Gate Closers & Hinges



ReadyFit (p.32)



Flush Mount (p.34)



Center Mount (p.35)



EASY (p.36)

MODEL	INCLUDES HINGES	EXTERNAL OR INTERNAL MOUNT	FLUSH OR CENTER MOUNTED	MOUNTING BRACKETS	FIXING METHOD	MAXIMUM SELF-CLOSING WEIGHT*
ReadyFit	Yes	External	Flush	Aluminum or Steel	Screw-on or Weld-on	260 lb (120kg)
Flush Mount	Yes**	Internal	Flush	Aluminum or Steel	Screw-on or Weld-on	260 lb (120kg)
Center Mount	Yes**	Internal	Center	Aluminum or Steel	Screw-on or Weld-on	260 lb (120kg)
EASY	No	External	Center	Aluminum	Screw-on	176 lb (82kg)

*CAUTION: Based on max gate size 72"H x 40"W (1800x1000mm).

For gates with greater HxW, or if conditions such as wind play a role, use hinge combinations with higher self-closing weight ratings.

**Post mounting brackets sold separately. No fasteners included.

DD KWIKFit ALUMINUM



KF3 (p.38)



KF3L2 (p.38)



KF3A (p.38)

DD KWIKFit™ POLYMER



KFP (p.40)



KFS (p.40)

	PRODUCT CODE	GATE MATERIAL	IDEAL GATE GAP	MAXIMUM SELF-CLOSING WEIGHT*	HINGE MATERIAL	COLOR OPTIONS
KWIKFIT ALUMINUM	KF3 Alignment ridges, self-closing	Metal	Fixed at ½" 13mm	44 lb/20kg	Aluminum	Black, Bronze, White
	KF3L2 2 side fixing legs, self-closing	Metal	Fixed at ½" 13mm	44 lb/20kg	Aluminum	Black, Bronze, White
	KF3A Wall or post mount, self-closing	Metal	Fixed at ¾" 19mm	44 lb/20kg	Aluminum	Black, Bronze, White
KWIKFIT	KFP No spring, non-self-closing	Metal, Wood, Vinyl	Fixed at ¾" 19mm	Plain Pivot No spring	Polymer	Black
	KFS Fixed tension, self-closing	Metal, Wood, Vinyl	Fixed at ¾" 19mm	44 lb/20kg	Polymer	Black

*Ratings are based upon two hinges on a maximum gate size of 5'H x 3'W (1500mmH x 900mmW)

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

Application

Childcare & Pool Safety

Ideal Gate Material

Metal, Wood, Vinyl, Chainlink

Dimensions

Page 48

Installation Video

The ultimate in child protection with Safety you can see and hear

NEW
VISUAL
unlatched
alarm

NEW
AUDIBLE
unlatched
alarm



NEW Visual "unlatched" alarm

Flashing LED lights give visual notification if the latch is opened or the gate is left unlatched.



NEW Audible "unlatched" alarm

An audible beep upon each entry or exit of a gate. Full alarm sounds only after 15 seconds of a gate being left open or unlatched.



NEW Rekeyable security lock

The 6-pin lock cylinder can be rekeyed, by a locksmith, to match other locks around the home (e.g. front door).



NEW Visible Lock Indicator

A "red-dot" indicator shows at-a-glance whether the latch is locked or unlocked. Simple peace-of-mind.



NEW Optional disarm Feature

The touch-sensor disarm feature allows you to temporarily disarm the ALERT for up to 15 minutes. DO NOT use the disarm feature on pool or safety gates.



NEW Ergonomic lift knob

With its new design, the lift knob is now more conveniently shaped and child resistant than ever.



Good Design Award

LIMITED LIFETIME WARRANTY
2-YEAR WARRANTY ON ALARM UNIT



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

MAGNALatch® ALERT Top Pull model



MagnaLatch® has set the standard for child safety gate latches for more than 25 years. Millions of families and caregivers worldwide have trusted MagnaLatch with their children's safety. Now the **MagnaLatch® ALERT** models set entirely new levels of safety and peace-of-mind for gates

around swimming pools, homes, childcare centers, schools and wherever child safety is critical. It offers dual electronic warnings: bright, flashing LED lights, and an audible alarm that sounds if a gate is left unlatched. Owners and users can see at a glance, and hear from a distance, whenever a gate is not fully secured.

The Top Pull model is ideal for all child and pool safety applications, while the shorter Vertical Pull model offers added security around side, front and pet gates (see over). A single beep upon each entry or exit warns of visitors or intruders. The **MagnaLatch® ALERT** is the ultimate gate latch – when you can't turn your back for a second.

Because you can't turn your back for a second

PRODUCT FEATURE VIDEO

- World's **ONLY** combined safety gate latch and electronic alarm
- The same advanced safety features as the MagnaLatch 'Series 3'
- Visual and audible alarms (flashing LEDs & sound alerts)
- Alarms notify if gate is open or not securely latched
- Single alert beep each time gate is entered/exited
- Full alarm mode if gate left open 15 seconds
- Optional: Touch-sensor disarm feature
- Long-life lithium battery included



CODE	COLOR	MODEL FEATURE	IDEAL GAP	GAP VARIANCE
ML3ATP	Black	Top Pull 6-Pin Lock - Keyed Alike + Alarm	3/4" (19mm)	1/2" - 1 1/2" (13-38mm)



Application

Safety & Security

Gate Material

Metal, Wood, Vinyl, Chainlink

Dimensions

Page 48

Installation Video

Security latch for front & side gates – Protection for family & pets

NEW
VISUAL
unlatched
alarm

NEW
AUDIBLE
unlatched
alarm



NEW Visual “unlatched” alarm

Single security alert beep & flashing light on each gate entry & exit to warn of intruders or danger to family or pets.



NEW Audible “unlatched” alarm

Hear from a distance if a gate is opened or left unlatched. After 15 seconds, opened gate beep alerts will turn to full alarm mode.



NEW Rekeyable security lock

The 6-pin lock cylinder can be rekeyed, by a locksmith, to match other locks around the home.



NEW Visible lock Indicator

Shows you at-a-glance whether MagnaLatch is locked or unlocked. Simple peace of mind.



NEW Optional disarm feature

The touch-sensor disarm feature allows you to temporarily disarm the ALERT for up to 15 minutes. DO NOT use the disarm feature on pool or safety gates.



Australian
Design
Award



Good Design Award

LIFETIME WARRANTY
LIMITED
2-YEAR WARRANTY ON ALARM UNIT



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

MAGNALatch® ALERT Vertical Pull model



New Magnalatch® ALERT 'Vertical Pull' now offers an entirely new line of business for fencing contractors. Being the world's **first and only combined gate latch and electronic alarm** system it is now the ideal latch-alarm for front, side, perimeter and pet gates around the home.

When you install this latch you are also installing a "security" gate alarm, with no need for electricians, wiring or special tools!

All **ALERT** models feature dual, built-in alarms that notify whenever a gate is opened or left unlatched. They feature flashing LEDs and an audible alarm so that you can see at a glance, and hear from a distance, whenever a gate is not fully secured.

A single beep is heard upon each entry or exit of a gate. This notifies whenever family, friend or an intruder enters or exits. If the gate is left open for 10 seconds a second beep will be heard. It's only after 15 seconds of the gate being left unlatched that the audible alarm begins to ramp up.

ALERT models feature all the regular Magnalatch features, including reliable magnetic latching, key lockable security and a Locked/Unlocked visual (red dot) indicator.

Magnalatch® ALERT Vertical Pull. Notices of family, friends or intruders



PRODUCT FEATURE VIDEO

- Single alert beep each time gate is entered/exited
- World's ONLY combined gate latch and electronic alarm
- Same advanced safety features as Magnalatch 'Series 3'
- Visual and audible alarms (flashing LEDs & sound alerts)
- Alarms notify if gate is open or not securely latched
- Full alarm mode if gate left open 15 seconds
- Long-life lithium battery included

CODE	COLOR	MODEL FEATURE	IDEAL GAP	GAP VARIANCE
ML3AVP	Black	Vertical Pull 6-Pin Lock - Keyed Alike + Alarm	3/4" (19mm)	1/2" - 1 1/2" (13-38mm)

SERIES 3

Application

Residential Commercial

Ideal Gate Material

Metal, Wood, Vinyl, Chainlink

Dimensions

Page 48

Installation Video

**World's #1
Child Safety Latch
for over 25 years**



MagnaLatch
'Series 3'
Top Pull

Australian
Design
Award



LIMITED **LIFETIME WARRANTY**



MagnaLatch
'Series 3'
Vertical Pull

Australian
Design
Award



Safer, ergonomic lift knob
New design more conveniently shaped and child resistant than ever



Visible Lock Indicator
Shows you, at-a-glance, whether MagnaLatch is locked or unlocked



Rekeyable Security Lock
The 6-pin lock can be rekeyed to match other locks around the home



Product traceability
Superior quality manufacturing and responsible product tracking



T-track innovation
Offers superior fixing strength and unsurpassed reliability



Built-in post cap spacing
No more need for separate post cap spacers




SELECTION GUIDE

MAGNALATCH



Industry leading Magnetic Technology



Permanent magnet sealed from the elements



Most intraday movement allowance in the industry



Improved drainage in latch & striker. Sloping features channel water out.



Vertical & horizontal alignment indicators identify if adjustment is required.

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS



ML3RPK
Round Post Adaptor Kit
See p.49

PRODUCT FEATURE VIDEO

- Improved, stylish "Series 3" design
- Industry leading magnetic latching technology
- Visual indicator provides Locked/Unlocked status
- 6-pin lock for higher security (rekeyable)
- Superior performance in extreme climates
- Vertical and horizontal adjustment
- Indicator marks tell you if adjustment is needed

CODE	COLOR	MODEL FEATURE	IDEAL GAP	GAP VARIANCE
ML3TP	Black	Top Pull 6-Pin Lock - Keyed Alike	3/4" (19mm)	3/8" - 1 3/8" (10-35mm)
ML3VP	Black	Vertical Pull 6-Pin Lock - Keyed Alike	3/4" (19mm)	3/8" - 1 3/8" (10-35mm)
ML3RPK	Black	ML3 Round Post Adaptor Kit	1 1/2" (38mm)	1 1/4" - 2 1/4" (32-57mm)



Application

Residential gates

Ideal Gate Material

Metal, Wood, Vinyl


Dimensions

Page 49

Installation Video

SIDE PULL MODEL

Lockable and non-locking versions for many applications

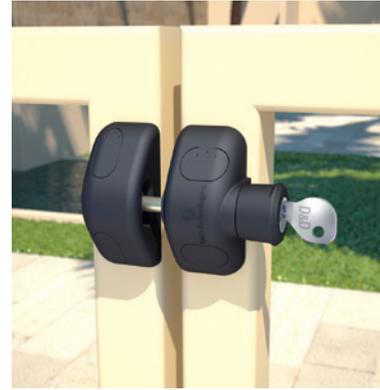

Easy horizontal and vertical adjustment at any time helps overcome gate sag or ground movement.

For glass-mounted models see page 44.

PRODUCT FEATURE VIDEO

- Same reliable magnetic latching as other MagnaLatch® models
- Available with or without lock cylinder
- Model for glass pool gates available
- Vertical & horizontal adjustment
- Stylish dress caps - no visible fasteners
- Small & unobtrusive - easy to install
- Will not rust or corrode

CODE	COLOR	MODEL - FEATURE	IDEAL GAP	GAP VARIANCE
MLSPS2L	Black	Key Lockable Side Pull	3/8" (10mm)	5/16" - 11/16" (7-17mm)
MLSPS2	Black	Side Pull	3/8" (10mm)	5/16" - 11/16" (7-17mm)

LIMITED LIFETIME WARRANTY



DD T-Latch™

Toggle-style, Padlockable Gravity Gate Latch

Application

Residential security

Ideal Gate Material

Metal, Wood, Vinyl

Dimensions

Page 49

Installation Video

PRODUCT FEATURE VIDEO

- Toggle action automatically compensates for any gate sag
- Fits all square posts & gate frames
- Adjusts vertically and horizontally
- Padlockable, with padlock storage feature
- Ultra-tough polymer body
- Stainless steel latch bolt

CODE	COLOR	MODEL - FEATURE	IDEAL GAP	GAP VARIANCE
TL01	Black	Padlockable latch	1" (25mm)	3/8" - 1 3/4" (10-44mm)



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS


DROP BOLTS

GLASS RANGE

DIMENSIONS



Padlock storage feature

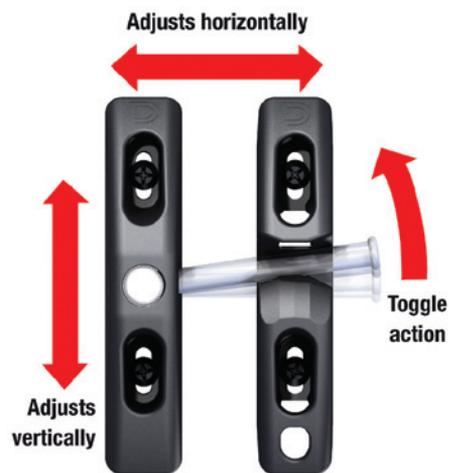

LOCKED POSITION (padlock not included)



D[®] LOKKLatch[®] MAGNETIC Key-Lockable, Dual Gate Lock. Push/Pull Handle.

Application

Residential security

Ideal Gate Material

Metal, Wood, Vinyl

Dimensions

Page 50

Installation Video

Features reliable magnetic technology

Decorative trim finishes included

Locks and operates from both sides of the gate

Quick and easy installation. Requires only one drilled hole.

LIMITED **LIFETIME WARRANTY**



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS



It's a lock. It's a latch. It's magnetic.

PRODUCT FEATURE VIDEO



Black Trim



Brushed Trim



Chrome Trim

- Operates and locks from both sides of the gate
- Proven D&D-patented magnetic latching
- Black trim covers included (metallic options)
- No visible fasteners
- Keyed-alike or keyed different
- Dual 6-pin rekeyable locks
- Vertical & horizontal adjustment
- Match trim covers with TruClose Series 3 hinges

CODE	COLOR	TRIM FINISH	IDEAL GAP	GAP VARIANCE
LLM*BT	Black	Black	3/4" (19mm)	3/8" - 1 1/4" (10-32mm)
LLM*CT	Black	Chrome	3/4" (19mm)	3/8" - 1 1/4" (10-32mm)
LLM*ST	Black	Brushed	3/4" (19mm)	3/8" - 1 1/4" (10-32mm)

*NOTE: Insert "A" for keyed alike or "D" for keyed different.





LOKKLatch®

DELUXE

Key-Lockable Privacy & Security Gate Latch

Application

Privacy and security

Ideal Gate Material

Metal, Wood, Vinyl

Dimensions

Page 50

Installation Video

HEAVY DUTY



External
Access
Push
Button

Quick
and easy
installation.
Requires only
one drilled
hole.

Locks and
operates from
both sides
of the gate

LIMITED **LIFETIME
WARRANTY**



The ultimate, key-lockable gate latch!



PRODUCT FEATURE VIDEO

- Operates & locks from both sides of gate
- Dual 6-pin rekeyable locks
- Keyed-alike or keyed different
- Fits fence posts up to 6" (150mm) deep
- Easy installation: drill only one hole through post
- Vertically & horizontally adjustable
- Super-strong engineered polymer housings
- 316 marine-grade stainless steel components

CODE	COLOR	KEYED	GATE MATERIAL	IDEAL GAP	GAP VARIANCE
LLDAB	Black, White	Different	Metal, Wood, Vinyl	1" (25mm)	5/8" - 1 1/2" (16-38mm)
LLDAB-A	Black, White	Alike	Metal, Wood, Vinyl	1" (25mm)	5/8" - 1 1/2" (16-38mm)

LokkLATCH DELUXE requires only one hole drilled through the post.



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

Application

Square posts & Chainlink

Ideal Gate Material

Metal, Wood, Vinyl, Chainlink

Dimensions

Page 50

Installation Video

316
marine grade
stainless steel
components
will not rust

Adjusts
easily to
allow for
gate sag



LokkLatch®
models are
all keyed
alike


LIMITED **LIFETIME**
WARRANTY



PRODUCT FEATURE VIDEO



- High-tech, stylish design
- Key lockable - No need for padlock
- External Access Kit (optional) allows for operation from both sides of gate
- Vertical & horizontal adjustment
- Quick and easy to install
- Won't rust or corrode
- Round post model fits most Chainlink diameters

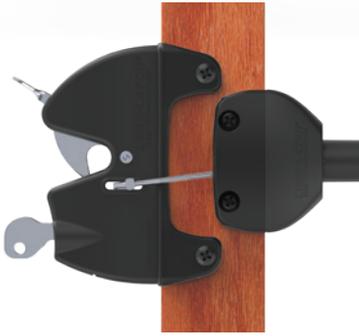

CODE	FEATURE	COLOR	GATE MATERIAL	IDEAL GAP	GAP VARIANCE
LLAA	Latch only	Black, White	Metal, Wood, Vinyl	3/4" (19mm)	3/8" - 1 1/2" (10-38mm)
LLB	EAK only	Black, White	Metal, Wood, Vinyl	-	-
LLAAB	Latch + EAK	Black, White	Metal, Wood, Vinyl	3/4" (19mm)	3/8" - 1 1/2" (10-38mm)
LLABRND	Round Post Latch + EAK	Black	Chainlink	1 1/2" (38mm)	1" - 2" (25-50mm)



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS



LOKKLATCH®

PRO.SL

Self-Locking Gate Latch for Hotels & Apartments

Application

Residential & Commercial

Ideal Gate Material

Metal, Wood, Vinyl

Dimensions

Page 51

Installation Video



Added security requires key for entry and exit

External Access Push-Button

Requires only one drilled hole through post

LIMITED **LIFETIME WARRANTY**





Self-locking security

PRODUCT FEATURE VIDEO

- Self-locking: automatically locks when gate closes
- Requires key to enter and exit
- Operates from both sides of gate
- Dual 6-pin rekeyable locks
- Fits fence posts up to 6" (150mm) deep
- Vertically & horizontally adjustable
- Super strong engineered polymer
- 316 marine grade stainless steel components



Vinyl model with wider side-fixing legs

CODE	COLOR	KEYED	GATE MATERIAL	IDEAL GAP	GAP VARIANCE
LLP1S	Black, White	Different	Metal, Wood	3/4" (19mm)	1/2" - 1 1/2" (13-38mm)
LLP1S-KSA	Black	Alike	Metal, Wood	3/4" (19mm)	1/2" - 1 1/2" (13-38mm)
LLP2S-K	Black	Different	Vinyl	3/4" (19mm)	1/2" - 1 1/2" (13-38mm)
LLP2S -KSA	Black	Alike	Vinyl	3/4" (19mm)	1/2" - 1 1/2" (13-38mm)

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

Application

Residential & Pool Safety

Ideal Gate Material

Metal, Wood, Vinyl

Max Self-closing weight

66 lb • 30 kg

Dimensions

Page 51

Simple tension adjustment from either end



TruClose® Hinge Safety Cap

Optional. Helps prevent toddlers from using bottom hinge as a climbing foothold. CODE: TCACAPS3



TCA1S3



TCA2S3



TCA3S3

Australian Design Award



LIMITED LIFETIME WARRANTY



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE



KWIKFIT

GATE EXTRAS

DROP BOLTS


GLASS RANGE

DIMENSIONS

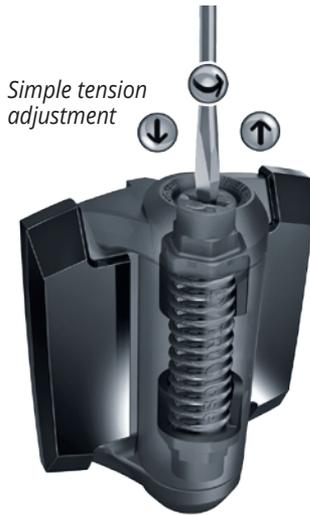

"L2" models have quick-fit alignment legs for fast installation and added fixing strength.

DECORATIVE TRIM COVERS:



PRODUCT FEATURE VIDEO

- D&D-patented tension adjustment
- Won't rust, bind, sag or stain
- Adjust tension from either end (tension adjustment is always facing up)
- UV-stabilized, super-strong engineered polymer (self-lubricating durability)
- Internal stainless steel closing spring
- Increased performance over previous models
- Decorative trim covers included - no visible fasteners
- Trim covers to co-ordinate with LokkLatch MAGNETIC
- Regular Range self-closes gates up to 66 lb (30kg)

CODE	TRIM FINISH	GATE MATERIAL	SIDE LEGS	IDEAL GAP	GAP VARIANCE	SOLD AS
TCA1S3BT	Black	Metal	-	¾" (19mm)	¼" - ⅞" (6-22mm)	1 Pair
TCA1S3CT	Chrome	Metal	-	¾" (19mm)	¼" - ⅞" (6-22mm)	1 Pair
TCA1S3ST	Brushed	Metal	-	¾" (19mm)	¼" - ⅞" (6-22mm)	1 Pair
TCA1S3WT	White	Metal	-	¾" (19mm)	¼" - ⅞" (6-22mm)	1 Pair
TCA1L2S3BT	Black	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCA1L2S3CT	Chrome	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCA1L2S3ST	Brushed	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCA1L2S3WT	White	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCA2S3BT	Black	Metal/Wood	-	¾" (19mm)	¼" - ⅞" (6-22mm)	1 Pair
TCA2L2S3BT	Black	Metal/Wood	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCA3S3BT	Black	Vinyl/Wood	-	¾" (19mm)	¼" - ⅞" (6-22mm)	1 Pair
TCA3L2S3BT	Black	Vinyl/Wood	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCA3L2S3WT	White	Vinyl/Wood	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCACAPS3	Black	Safety Cap	-	-	-	1 Each

Application

Larger, heavier safety gates

Ideal Gate Material

Metal, Wood, Vinyl

Max self-closing weight

154 lb • 70 kg

Dimensions

Page 52

Installation Video

Simple tension adjustment from either end



TruClose® Hinge Safety Cap

Optional. Helps prevent toddlers from using bottom hinge as a climbing foothold.

CODE: TCHDCAPS3



TCHD1AS3



TCHD1S3



TCHD2S3



Australian Design Award



LIMITED LIFETIME WARRANTY



Simple tension adjustment

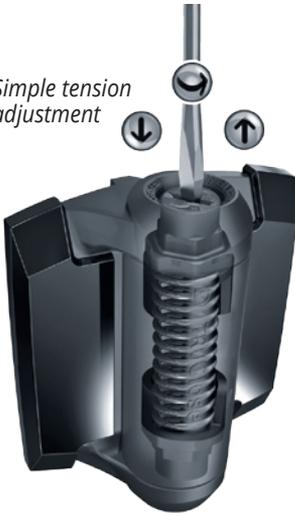


"L2" models have quick-fit alignment legs for fast installation and added fixing strength.

PRODUCT FEATURE VIDEO

- D&D-patented tension adjustment
- Won't rust, bind, sag or stain
- Adjust tension from either end (tension adjustment is always facing up)
- UV-stabilized, super-strong engineered polymer (self-lubricating durability)
- Internal stainless steel closing spring
- Increased performance over previous models
- Decorative trim covers included - no visible fasteners
- Trim covers to co-ordinate with LokkLatch MAGNETIC
- Heavy Duty Range self-closes gates up to 154 lb (70kg)

DECORATIVE TRIM COVERS:



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

CODE	TRIM FINISH	GATE MATERIAL	SIDE LEGS	IDEAL GAP	GAP VARIANCE	SOLD AS
TCHD1AS3BT	Black	Metal	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AS3CT	Chrome	Metal	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AS3ST	Brushed	Metal	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AS3WT	White	Metal	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AL1S3BT	Black	Metal	1 Leg	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AL2S3CT	Chrome	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD1AL2S3ST	Brushed	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD1AL2S3WT	White	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD1AL2S3BT	Black	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD1S3BT	Black	Metal/Wood/Vinyl	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1L2S3BT	Black	Metal/Wood/Vinyl	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD2L1S3BT	Black	Vinyl/Wood	1 Leg	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD2L1S3WT	White	Vinyl/Wood	1 Leg	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD2L2S3BT	Black	Vinyl/Wood	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD2L2S3WT	White	Vinyl/Wood	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHDCAPS3	Black	Safety Cap	-	-	-	1 Each



Application

Residential heavy gates

Ideal Gate Material

Wood, Vinyl

Max self-closing weight

132 lb • 60 kg

Dimensions

Page 52


Installation Video

HEAVY DUTY

Easy vertical and horizontal adjustment




Simple tension adjustment

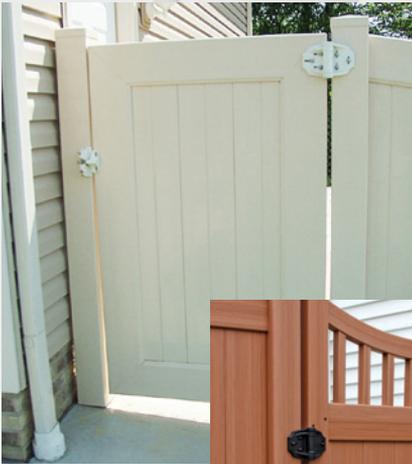

PRODUCT FEATURES

- 3-way adjustment - vertical, horizontal & tension
- Self-closes wood and vinyl gates up to 132 lb (60kg)
- Up to 3/4" (19mm) adjustment
- UV stabilized, super-strong engineered polymer (self-lubricating durability)
- Internal stainless steel spring and components
- Only one person needed to hang large gates
- Combine with D&D latches for maximum vertical & horizontal adjustment

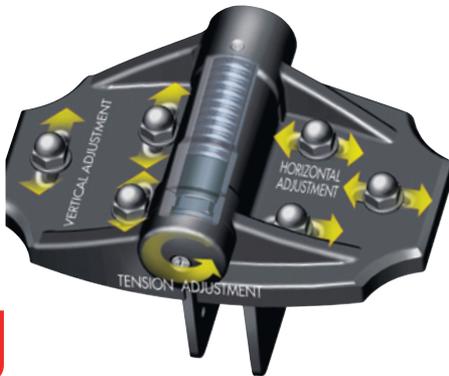

CODE	GATE MATERIAL	IDEAL GAP	GAP VARIANCE	COLOR
TCHDMA1	Wood & Vinyl	1" (25mm)	5/8" - 1 3/8" (16-35mm)	Black
TCHDMA1WT	Wood & Vinyl	1" (25mm)	5/8" - 1 3/8" (16-35mm)	White

LIMITED **LIFETIME WARRANTY**



MINIMULTIADJUST™

3-way Adjustable, Self-Closing Hinges



Application

New & existing gates

Ideal Gate Material

Metal, Wood, Vinyl, Chainlink

Max self-closing weight

55 lb • 25 kg

Dimensions

Page 53

Installation Video

REGULAR RANGE



Simple tension adjustment



TCAMA1



TCAMA2RND

PRODUCT FEATURES

- 3-way adjustment - Vertical, horizontal & tension
- Fits gate gaps up to 2" (50mm)
- Self-closes gates up to 55 lb (25kg)
- UV stabilized, super-strong engineered polymer (self-lubricating durability)
- Internal stainless steel spring and components
- Round post model for Chainlink gates available
- Use with D&D latches for maximum adjustment

CODE	GATE MATERIAL	IDEAL GATE GAP	GAP VARIANCE	COLOR
TCAMA1	Metal, Wood, Vinyl	1 1/8" (29mm)	7/8"-1 1/2" (22-38mm)	Black
TCAMA2	Metal, Wood, Vinyl	1 3/8" (35mm)	7/8"-2" (22-50mm)	Black
TCAMA2WT	Metal, Wood, Vinyl	1 3/8" (35mm)	7/8"-2" (22-50mm)	White
TCAMA2RND	Chainlink	1 3/8" (35mm)	7/8"-2" (22-50mm)	Black

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

LIMITED LIFETIME WARRANTY



TRUClose®

ROUND

Self-Closing Hinges for Round Posts

Application

Heavy, round post gates

HEAVY DUTY

Ideal Gate Material

Chainlink

Max self-closing weight

132 lb • 60 kg

Dimensions

Page 53

Installation Video



TCHDRND1-MK2
Gate diameters:
1 3/8" & 1 5/8"
(35 & 41mm)
Post diameters:
1 7/8", 2 3/8" & 2 7/8"
(48, 60 & 73mm)

Simple
tension
adjustment

TCHDRND2-MK2
Gate diameters:
1 7/8" (48mm)
Post diameters:
1 7/8" & 2 7/8"
(48 & 73mm)



PRODUCT FEATURES

- D&D-patented tension adjustment
- Self-closes gates up to 132 lb (60kg)
- UV stabilized, super-strong engineered polymer (self-lubricating durability)
- Internal stainless steel spring and components
- Fasteners included

CODE	GATE MATERIAL	IDEAL GAP	GAP VARIANCE	COLOR
TCHDRND1-MK2	Chainlink	1" (25mm)	3/8" - 1 3/8" (19-35mm)	Black
TCHDRND2-MK2	Chainlink	1" (25mm)	3/8" - 1 3/8" (19-35mm)	Black

LIMITED LIFETIME WARRANTY



DECOMOLD™

Decorative-Style, Self-Closing Polymer T-Hinge



Application

Homes & gardens

Ideal Gate Material

Wood

Max self-closing weight

55 lb • 25 kg

Dimensions

Page 53

Installation Video

REGULAR RANGE



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE


KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

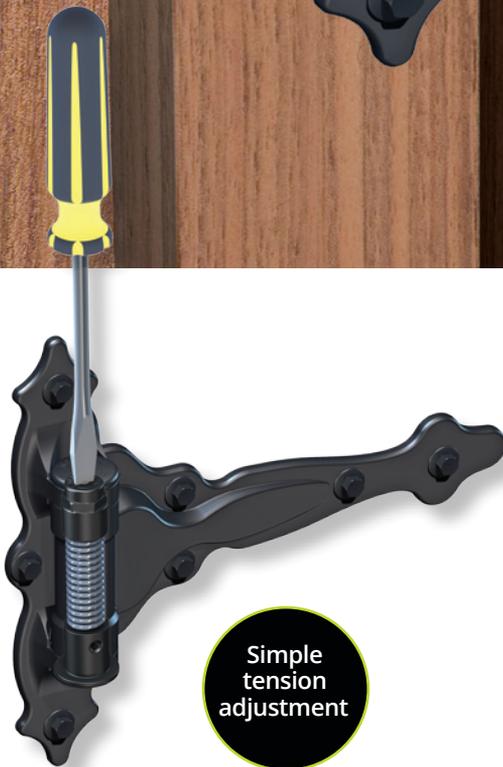

Simple tension adjustment

PRODUCT FEATURES

- Self-closing T-Hinge for light-mid weight wood gates
- Won't rust, bind, sag or stain
- Self-close gates up to 55 lb (25kg)
- Super-strong engineering polymer and stainless steel spring
- Thicker, molded rib through the center of the hinge leaf adds strength
- Fasteners included

CODE	GATE MATERIAL	IDEAL GATE GAP	GAP VARIANCE	COLOR
TCA4	Wood	¾ (19mm)	¼" - ⅝" (6-22mm)	Black

LIMITED LIFETIME WARRANTY

Application

Residential, Commercial


Ideal Gate Material

Aluminum or Steel

Dimensions

Page 54

Installation Video

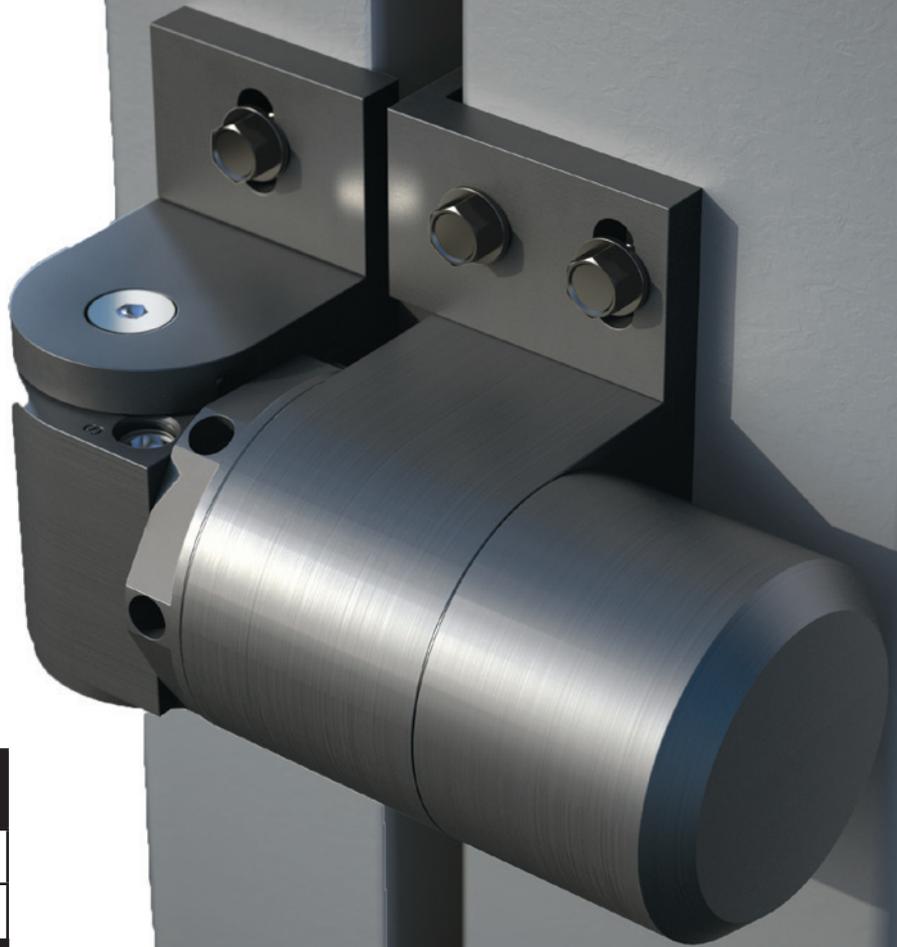

Hinge Combinations	Max self-Closing Gate Weight Max*
108 + SM	180 lb (80kg)
108 + 108	260 lb (120kg)
Access Control	Weight Capacity
SM + SM	1,500 lb (680kg)
<p>*CAUTION: Based on max gate size 72"H x 40"W (1800x1000mm). For gates with greater HxW, or if weather conditions such as wind play a role, use hinge combinations with higher self-closing weight ratings.</p>	

A hinge-closer in one small, powerful package

LIMITED 2 YEAR WARRANTY

SureClose RFSM



Non-self-closing. Load bearing hinge

SureClose RF108



Adjustable self-closing speed and final snap-close action

Multiple mounting options:

- Mounting brackets included
- Aluminum screw-on
- Steel weld-on
- Fasteners included

Quick-fit alignment legs:
For ease of installation, alignment and double face-fixing strength.


Vertical alignment slots

Multiple adjustment options :

- Self-closing speed and force
- Final snap-close action
- Horizontal adjustment
- ADA compliant

Dual Bearing Glide System™

Two rows of bearings for consistently superior performance.

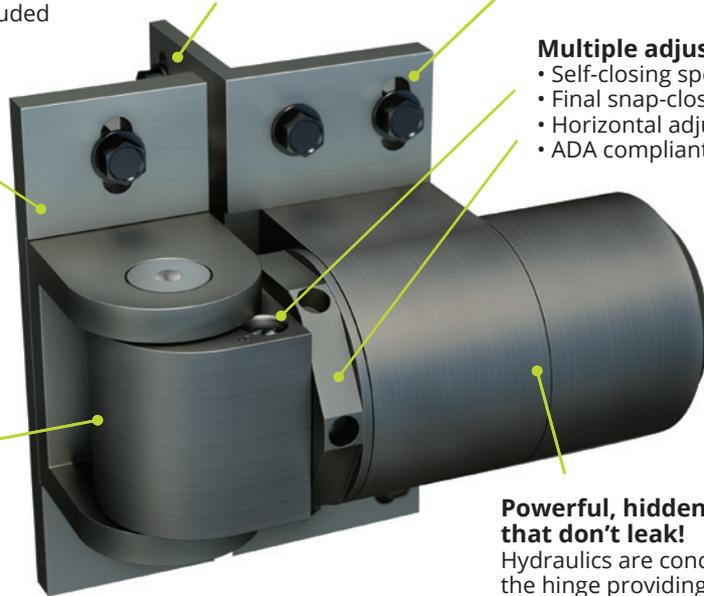

Powerful, hidden hydraulics... that don't leak!


Hydraulics are concealed within the hinge providing a controlled, quiet close in a tamper-resistant, compact design. No need to ever add fluid.

PRODUCT FEATURE VIDEO

CODE	MODEL	TYPE	BRACKET	GAP VARIANCE	SELF-CLOSING FROM	MAXIMUM GATE SWING	FINAL SNAP-CLOSE ACTION	POOL/CHILD SAFETY**	FENCE POST SIZE MINIMUM
74001313	RF SM S	Hinge	Aluminum Screw-on	½" - 1 ¾" (12-35mm)	-	180°	-	-	2" (50mm)
74001315	RF SM W	Hinge	Steel Weld-on	½" - 1 ¾" (12-35mm)	-	180°	-	-	2" (50mm)
74108313	RF 108 S	Hinge/Closer	Aluminum Screw-on	½" - 1 ¾" (12-35mm)	85°	180°	Yes	-	2" (50mm)
74108315	RF 108 W	Hinge/Closer	Steel Weld-on	½" - 1 ½" (12-35mm)	85°	180°	Yes	-	2" (50mm)
74108323	RF 108SF S	Hinge/Closer & Safety Feature	Aluminum Screw-on	½" - 1 ¾" (12-35mm)	90°	90°	Yes	Yes**	2" (50mm)
74108325	RF 108SF W	Hinge/Closer & Safety Feature	Steel Weld-on	½" - 1 ¾" (12-35mm)	90°	90°	Yes	Yes**	2" (50mm)

**Yes (SF) = Gate will not hold open at 90° (OK for safety gates). Do NOT use a hinge with a 90° hold-open feature (-) for pool/child safety gates. IMPORTANT: For maximum gate weights, see weight chart on page 32.

CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.

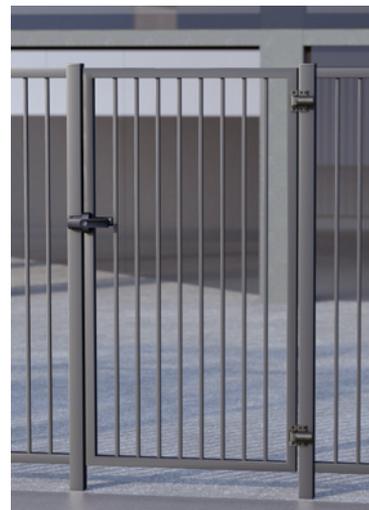

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

Application

Commercial-style gates

Ideal Gate Material

Aluminum or Steel

Dimensions

Page 55-56

Installation Video




Flush Mount Closer screw-on bracket

Hinge Combinations	Self-Closing Gate Weight Max*
57 + SM	90 lb (40kg)
57 + 57	180 lb (80kg)
108 + SM	180 lb (80kg)
108 + 108	260 lb (120kg)
Access Control	Weight Capacity
SM + SM	1,500 lb (680kg)

***CAUTION:**
Based on max gate size 72"H x 40"W (1800x1000mm). For gates with greater HxW, or if weather conditions such as wind play a role, use hinge combinations with higher self-closing weight ratings.

Flush Mount swings in or out

Center Mount swings in & out

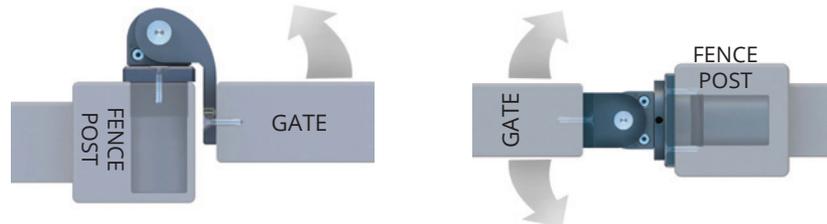

FLUSH MOUNT

**Yes (SF) = Gate will not hold open at 90° (OK for safety gates). Do NOT use a hinge with a 90° hold-open feature (-) for pool/child safety gates. IMPORTANT: For maximum gate weights, see weight chart above. CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.

CODE*	MODEL	TYPE	BRACKET	SELF-CLOSING FROM	MAX GATE SWING	FENCE POST SIZE MINIMUM	POOL/CHILD SAFETY**
75001213	SM AT90 S	Hinge	Aluminum Screw-on	-	180°	2" (50mm)	-
75057213m	57 AT90 S	Closer & Hinge	Aluminum Screw-on	85°	180°	2" (50mm)	-
75057223m	57SF AT90 S	Closer & Hinge	Aluminum Screw-on	90°	90°	2" (50mm)	Yes
75108213m	108 AT90 S	Closer & Hinge w/ Final Snap Action	Aluminum Screw-on	85°	180°	3" (76mm)	-
75108223	108SF AT90 S	Closer & Hinge w/ Final Snap Action	Aluminum Screw-on	90°	90°	3" (76mm)	Yes
75001214m	SM AT90 W	Hinge	Steel Weld-on	-	180°	2" (50mm)	-
75057214m	57 AT90 W	Closer & Hinge	Steel Weld-on	85°	180°	2" (50mm)	-
75057224m	57SF AT90 W	Closer & Hinge	Steel Weld-on	90°	90°	2" (50mm)	Yes
75108214m	108 AT90 W	Closer & Hinge w/ Final Snap Action	Steel Weld-on	85°	180°	3" (76mm)	-
75108224m	108SF AT90 W	Closer & Hinge w/ Final Snap Action	Steel Weld-on	90°	90°	3" (76mm)	Yes


LIMITED 2 YEAR WARRANTY

Installation Video


Mounting Brackets:

A variety of gate brackets allow for virtually any square-post mounting application:

- Steel or Aluminum
- Fastened or Welded
- Flush mount or center mount



NOTE: Flush and Center Mount model post brackets are sold separately. Fasteners not included. See page 59 for complete Bracket selection.

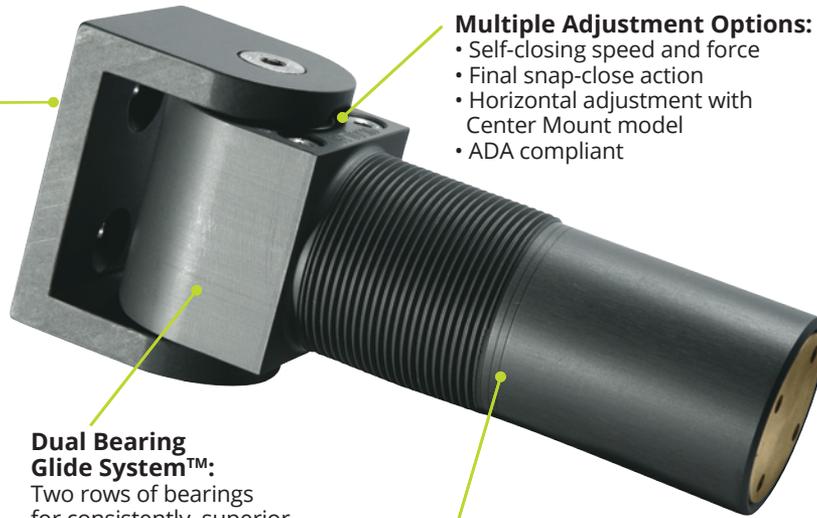

Multiple Adjustment Options:

- Self-closing speed and force
- Final snap-close action
- Horizontal adjustment with Center Mount model
- ADA compliant


Dual Bearing Glide System™:

Two rows of bearings for consistently superior performance. (SM models only)

Powerful, hidden hydraulics... that don't leak!

Hydraulics inside the hinge are concealed within the fence post providing a small footprint. Controlled, quiet close in a tamper resistant, compact design. No need to ever add fluid. (57 & 108 models)

PRODUCT FEATURE VIDEO

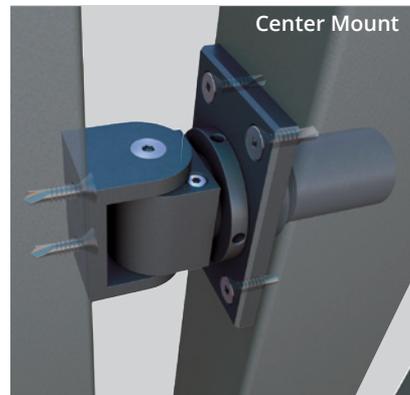

CENTER MOUNT

CODE*	MODEL	TYPE	BRACKET	SELF-CLOSING FROM	MAX GATE SWING	FENCE POST SIZE MIN.	POOL/CHILD SAFETY**
75001113	SM S	Hinge	Aluminum Screw-on	-	90°	2 1/2" (64mm)	-
75057113m	57 S	Closer & Hinge	Aluminum Screw-on	85°	90°	2 1/2" (64mm)	-
75057123m	57SF S	Closer & Hinge	Aluminum Screw-on	90°	90°	2 1/2" (64mm)	Yes
75108113m	108 S	Closer & Hinge w/ Final Snap Action	Aluminum Screw-on	85°	90°	3" (76mm)	-
75108123m	108SF S	Closer & Hinge w/ Final Snap Action	Aluminum Screw-on	90°	90°	3" (76mm)	Yes
75001114	SM W	Hinge	Steel Weld-on	-	90°	2 1/2" (64mm)	-
75057114m	57 W	Closer & Hinge	Steel Weld-on	85°	90°	2 1/2" (64mm)	-
75057124m	57SF W	Closer & Hinge	Steel Weld-on	90°	90°	2 1/2" (64mm)	Yes
75108114m	108 W	Closer & Hinge w/ Final Snap Action	Steel Weld-on	85°	90°	3" (76mm)	-
75108124m	108SF W	Closer & Hinge w/ Final Snap Action	Steel Weld-on	90°	90°	3" (76mm)	Yes

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

Application

Residential, Commercial

Ideal Gate Material

Aluminum or Steel

Dimensions

Page 58

FITS TO TOP OF GATE

Can be used with existing center-mounted hinges. See page 55 for details.



LIMITED 2 YEAR WARRANTY




Mounting system:

- Aluminum, screw-on mounting brackets
- Mounting brackets included
- Fasteners included
- Adjustment tool included

Dual Bearing Glide System™

Two rows of bearings for consistently superior performance.

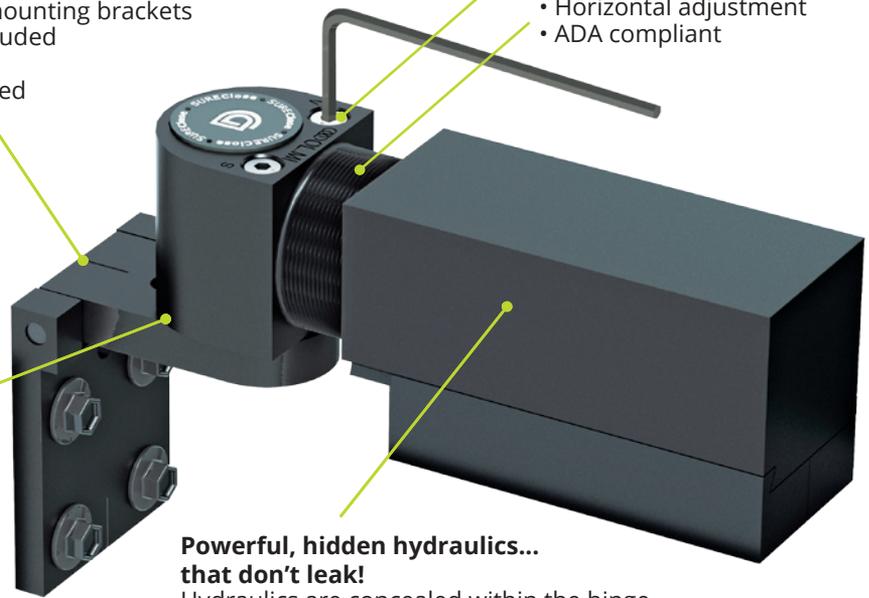


Multiple adjustment options:

- Self-closing speed and force
- Final snap-close action
- Horizontal adjustment
- ADA compliant

Powerful, hidden hydraulics... that don't leak!

Hydraulics are concealed within the hinge, providing quiet, controlled closure in a tamper-resistant, compact design. No need to ever add fluid.

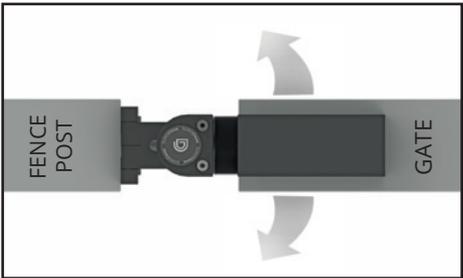

PRODUCT FEATURES

- Add-on hydraulic closer - smooth and quiet
- Usable with most center-mounted hinge types
- Ideal for new or existing gates
- Self-closes gates up to 180 lb (80kg) Easy to install: mounts onto top of gate
- Horizontally adjustable - up to 4" (100mm) gate gaps
- Same features as all 108SF closers
- Opens to, and self-closes from, 90° (no hold-open)
- Maintenance free - never add fluid
- High corrosion resistance - thick 50 micron anodizing

Gate Size	Self-Closing Gate Weight Max*
72"H x 40"W (1.8mH x 1mW)	180 lb (80kg)
72"H x 48"W (1.8mH x 1.2mW)	130 lb (60kg)

***CAUTION:**
Based on max gate size 72"H x 48"W (1.8m x 1.2m). For gates with greater HxW, or if conditions such as wind play a role, use a different model of SureClose hinge + closer combination with higher self-closing weight ratings.

CODE*	MODEL	TYPE	BRACKET	GAP VARIANCE	SELF-CLOSING FROM	MAX GATE SWING	POOL/CHILD SAFETY**	FENCE POST SIZE MIN.
72108423	SCE 108SF S	Closer	Aluminum	2" - 4" (50-100mm)	90°	90°	Yes	2" (50mm)

*All EASY closers include fasteners, gate and post mounting brackets.
 **Yes (SF) = Gate will not hold open at 90° (OK for safety gates). Do NOT use a hinge with a 90° hold-open feature (-) for pool/child safety gates.
 IMPORTANT: For maximum gate weights, see weight chart above.
 CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

Application

Residential, Commercial

Ideal Gate Material

Aluminum, Steel

Dimensions

Page 60

D&D-
patented
tension
adjustment

3 models
for different
applications

Wall
and post
mounting
styles




KF3ABL

Post/Wall-to-Gate configuration




KF3ABL

Post-to-Gate configuration




KF3BL

Post-to-Gate mount with alignment ridges



KF3L2BL

Post-to-Gate mount with side-fixing legs





Black (Gloss)

KF3ABL

Mounts to post or wall if no post available



Bronze (Satin)

KF3L2BR

Two side fixing legs for added strength




White (Gloss)

KF3WT

Alignment ridges for fast and easy installation.

** White only available in North America*

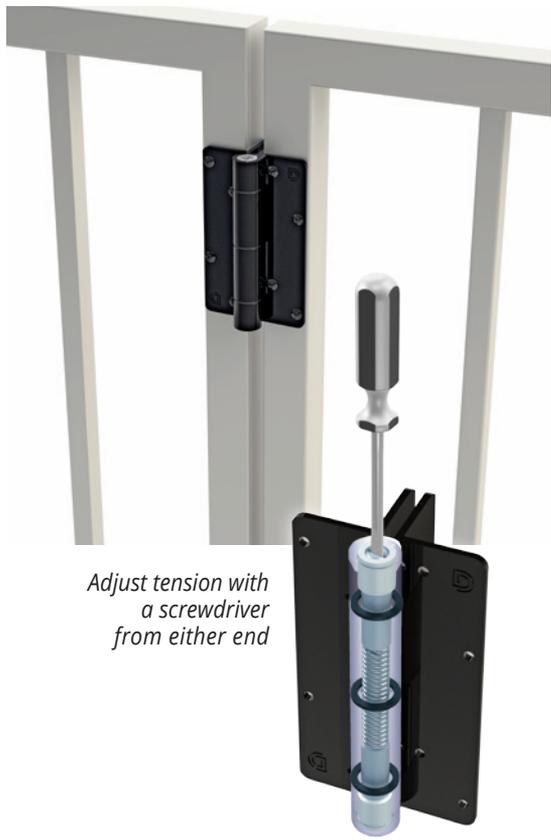

Adjust tension with a screwdriver from either end

PRODUCT FEATURES

- Traditionally styled 5 3/4" (120mm) self-closing hinges
- Aluminum construction with powdercoated finish
- Wall- and post-mount models available
- Internal stainless steel closing spring
- D&D-patented tension adjustment
- One-handed tension adjustment from either end (tension adjustment is always facing up)
- Low-friction polymer washer material
- Self-closes gates up to 44 lb (20kg)

CODE	COLOR	MODEL/FEATURE	GAP VARIANCE
KF3ABL	Black	Wall or post mounted	Fixed at 3/4" (19mm)
KF3ABR	Bronze	Wall or post mounted	Fixed at 3/4" (19mm)
KF3AWT	White	Wall or post mounted	Fixed at 3/4" (19mm)
KF3BL	Black	Alignment ridges	Fixed at 1/2" (13mm)
KF3BR	Bronze	Alignment ridges	Fixed at 1/2" (13mm)
KF3WT	White	Alignment ridges	Fixed at 1/2" (13mm)
KF3L2BL	Black	2 Side fixing legs	Fixed at 1/2" (13mm)
KF3L2BR	Bronze	2 Side fixing legs	Fixed at 1/2" (13mm)
KF3L2WT	White	2 Side fixing legs	Fixed at 1/2" (13mm)

NOTE: KwikFit Aluminum hinges are sold as single hinges. For pairs and other kitting options, please contact your D&D sales representative.

LIMITED 2 YEAR WARRANTY

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS



KwikFit™

POLYMER

General-Purpose Gate Hinges for Light to Medium Gates

Application

Residential Gates

Ideal Gate Material

Metal, Wood, Vinyl

Max self-closing Weight

44-55 lb • 20-25 kg

Dimensions

Page 61



● PRODUCT FEATURE VIDEO

- Economical gate hinges
- KFP hinges for gates up to 55lb (25kg)
- KFS self-closing hinges for gates up to 44lb (20kg)
- Super-strong engineering polymer and stainless steel construction
- Won't rust, bind, sag or stain

CODE	COLOR	MODEL/FEATURE	GATE GAP	GATE MATERIAL
KFP	Black	Plain pivoting - No spring	Fixed at 3/4" (19mm)	Metal, Wood, Vinyl
KFS	Black	Self-closing - fixed tension	Fixed at 3/4" (19mm)	Metal, Wood, Vinyl

Installation Video

Installation Video



KFP
No spring,
plain pivoting



KFS
Self-closing,
fixed tension

KwikFit™ side-fixing legs offer quick and easy alignment of the hinges on gate and fence post. Double face-fixing (i.e. fixes to both face and side of post and gate) also adds strength.



LIMITED 2 YEAR WARRANTY



GATEStop™

Gate Protection Device in Three Sizes & Styles

Application

Residential

Ideal Gate Material

Metal, Wood, Vinyl

Dimensions

Page 61

Installation Video



TCGS3
Two side-fixing legs for added strength



TCGS1

TCGS2

TCGS3

PRODUCT FEATURE VIDEO

- Ideal gate alignment device
- Prevents damage to latches & hinges
- Greatly reduces gate-slam noise
- Tough, durable polymer + rubber bumper

CODE	COLOR	GATE MATERIAL
TCGS1	Black, White	Wood, Vinyl
TCGS2	Black	Metal, Wood, Vinyl
TCGS3	Black	Metal

LIMITED **LIFETIME WARRANTY**



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCaH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

GATEHandle™

SERIES 3 General Purpose Gate Handle

Application

Picket & privacy style gates

Ideal Gate Material

Metal, Wood, Vinyl

Dimensions

Page 61

Installation Video



PRODUCT FEATURES

- Series 3: Improved ergonomics & styling
- Fits both left-hand or right-hand opening gates
- Won't rust or stain
- Super-strong polymer construction
- Stainless steel fasteners included
- Side-fixing legs for quick alignment & added strength

LIMITED **LIFETIME WARRANTY**

CODE	COLOR	GATE MATERIAL
LL3GH	Black	Metal, Wood, Vinyl

Application

Residential, Commercial

Ideal Gate Material

Metal, Wood, Vinyl

Dimensions

Page 61

Installation Video



Optional Base Plate LBBPGB

LIFETIME WARRANTY


PRODUCT FEATURES

- 316 marine-grade stainless steel drop-rod
- Tough, engineered polymer mounting system
- 6-pin lock (rekeyable to match doors & gate locks)
- Retention grooves in drop-rod prevent bolt from dropping and dragging
- Bolt lengths: 18" & 24" (450 & 610mm)
- Models for vinyl & wood have added fixing points
- Optional Base Plate retains bolt into ground

CODE	COLOR	GATE MATERIAL	BOLT LENGTH
LB118BX	Black, White	Metal Gates	18" (450mm)
LB124BX	Black, White	Vinyl & Wood Gates	24" (610mm)
LB218BX	Black	Metal Gates	18" (450mm)
LB224BX	Black	Vinyl & Wood Gates	24" (610mm)
LBBPGB	Black	Optional Base Plate	-



Extra fixing points for vinyl and wood models

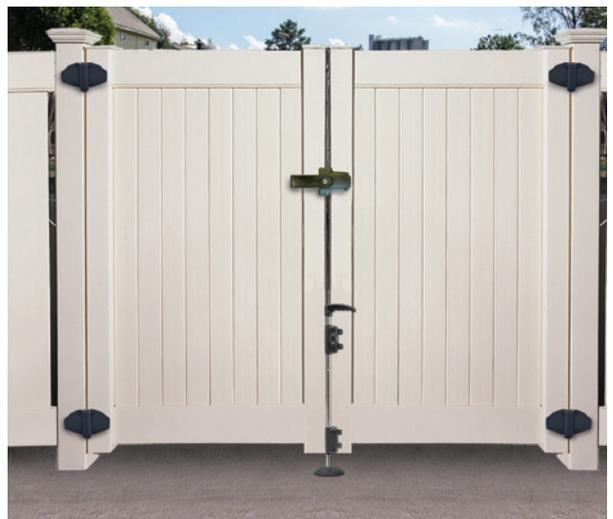

Application

Residential, Commercial

Ideal Gate Material

Metal, Wood, Vinyl

Dimensions

Page 61

Installation Video

Locked position




Padlock
not included

PRODUCT FEATURES

- Electro-polished stainless steel
- Powdercoated: corrosion resistant
- Padlockable; with padlock storage feature
- Tough, molded polymer mounting system
- Retention tabs prevent bolt from dropping & dragging on driveways
- Mounting systems for metal, wood and vinyl
- Bolt lengths: 24" & 40" (610 & 1020mm)
- Optional Base Plate retains bolt into ground

CODE	COLOR	GATE MATERIAL	BOLT LENGTH
QB124	Black	Metal Gates	24" (610mm)
QB224	Black	Vinyl & Wood Gates	24" (610mm)
QB140	Black	Metal Gates	40" (1020mm)
QB240	Black	Vinyl & Wood Gates	40" (1020mm)
LBBPGB	Black	Optional Base Plate	-

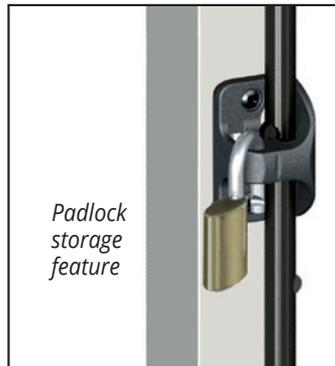

*Padlock
storage
feature*



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

LIFETIME WARRANTY

Application

Residential, Commercial

Ideal Gate Material

Glass

Dimensions

Page 62

Installation Video

Convenient
key-lockable
security

Designed
for 2"
(50mm)
round posts

Fits 5/16" or 3/8" (8 or 10mm)
thick glass and
2" (50mm) round post

Dress
caps mean
no visible
fasteners

LIMITED LIFETIME WARRANTY



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

D&D MAGNALatch®



Gate stops come in black, silver or mill finishes



Non-lockable model

The MagnaLatch® Side Pull model was the original magnetic gate latch invented by D&D Technologies. This revolutionary technology has now been proved over 25 years.



PRODUCT FEATURES

- Magnetically triggered (no jamming or sticking)
- Key-lockable and non-lockable models
- For glass thickness of 5/16" or 3/8" (8 or 10mm)
- Designed to fit 2" (50mm) round-post-to-glass gates
- Three gate stop finishes: Black, Silver or Milled
- Easy installation by a glass tradesman

CODE	MODEL - FEATURE	APPLICATION
MLSPS2LGHK	Lockable Glass Kit	Fits 5/16" - 3/8" (8-10mm) glass
MLSPS2GHK	Glass Kit	Fits 5/16" - 3/8" (8-10mm) glass

Fits 2" (50mm) round posts to frameless glass gates.

Vizage™ Stainless Steel, Magnetic Gate Latch

Polished stainless steel



Brushed stainless steel



PRODUCT FEATURES

- 316 marine-grade stainless steel
- Corrosion resistant latch bolt
- Adaptable to many mounting brackets
- Polished or Brushed surface finishes
- No visible fasteners (blind fixing from rear)
- Limited Lifetime Warranty

CODE	FINISH	MODEL - FEATURE	MOUNTING BRACKETS
MLSPS2VPSS	Polished	316 marine-grade stainless	Contact D&D Technologies for proper glass mounting brackets for stainless steel models.
MLSPS2VBSS	Brushed	316 marine-grade stainless	

LIMITED LIFETIME WARRANTY

Vizage™ Stainless steel mounting brackets with MagnaLatch Side Pull Latch

Application

Residential Pool Gates

Ideal Gate Material

Glass

Dimensions

Page 62-63



If used on swimming pool gates*

COMES WITH
 **MAGNALatch®**
SIDE PULL Key-Lockable

90° GLASS-TO-GLASS

180° GLASS-TO-GLASS



GLASS-TO-ROUND-POST

GLASS-TO-WALL OR POST



PRODUCT FEATURES

- Each mounting bracket includes one MagnaLatch® Side Pull 'Lockable'
- Vertical & horizontal adjustment
- Brackets are polished or brushed 316 marine-grade stainless steel
- For glass thickness of $\frac{5}{16}$ " or $\frac{3}{8}$ " (8 or 10mm)
- Will not rust or corrode

CODE	APPLICATION	MATERIAL	FINISH - TRIM/PLATES
MLSPG90SS	90° square Post-to-Glass	316 stainless steel	Brushed, Polished
MLSPG180SS	180° Glass-to-Glass	316 stainless steel	Brushed, Polished
MLSPRNDMSS	Glass to Round Post	316 stainless steel	Brushed, Polished
MLSPWPMSS	Glass to Wall or Post	316 stainless steel	Brushed, Polished

* NOTE: When used on swimming pool gates, mount the latch to pool side of gate at a minimum of 6" (150mm) below top of gate. There should be no space greater than $\frac{3}{8}$ " (10mm) within 18" (450mm) of Latch Release Knob.

Always consult local authorities for swimming pool Codes/Standards in your area.

LIFETIME WARRANTY

Vizage™ Architectural Hinges for Round-Post Fences & Glass Gates

Application


Residential

Ideal Gate Material

Glass

Dimensions

Page 63

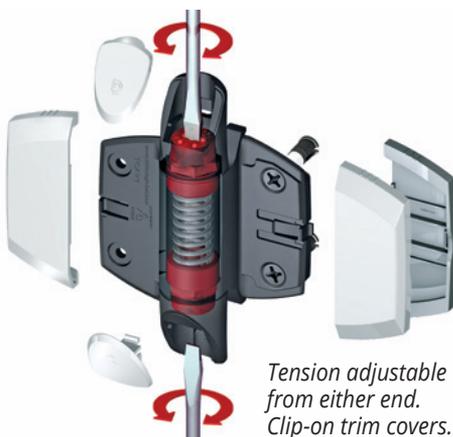

Tension adjustable from either end. Clip-on trim covers.

LIFETIME WARRANTY

PRODUCT FEATURES

- Adjustable, self-closing hinges
- Designed to fit 2" (50mm) round post to glass gates
- For glass thickness of 5/16" or 3/8" (8 or 10mm)
- Self-closes glass gates up to 55 lb (25kg)
- Won't rust, bind, sag or stain
- Strong, polymer construction
- Stainless steel closing spring
- Decorative trim covers - Polished or Brushed
- No visible fasteners
- 60° safety ramp on both ends (no child foothold)

CODE	APPLICATION	MATERIAL	FINISH - TRIM/PLATES
TCAV1-BSS	Fits 5/16" - 3/8" (6-8mm) glass	Polymer	Brushed
TCAV1-PSS	Fits 5/16" - 3/8" (6-8mm) glass	Polymer	Polished



SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE


DIMENSIONS






MAGNALatch Gate Gap Spacer

CODE	COLOR	MODEL - FEATURE	GAP VARIANCE
ML3 SPACER	Black	2" Gap Spacer - Works with ML2 & ML3	1 1/2"-2" (38-50mm)

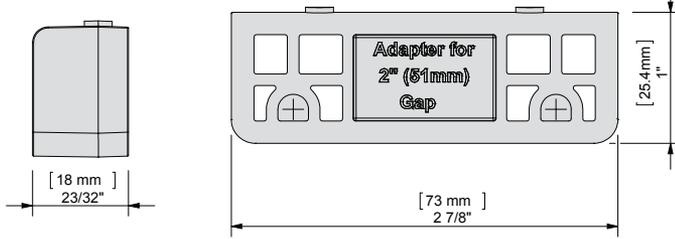


MAGNALatch Round Post Adaptor Kit

CODE	COLOR	MODEL - FEATURE	GAP VARIANCE
ML3RPK	Black	ML3 Round Post Adaptor Kit	1" - 2" (25-50mm)

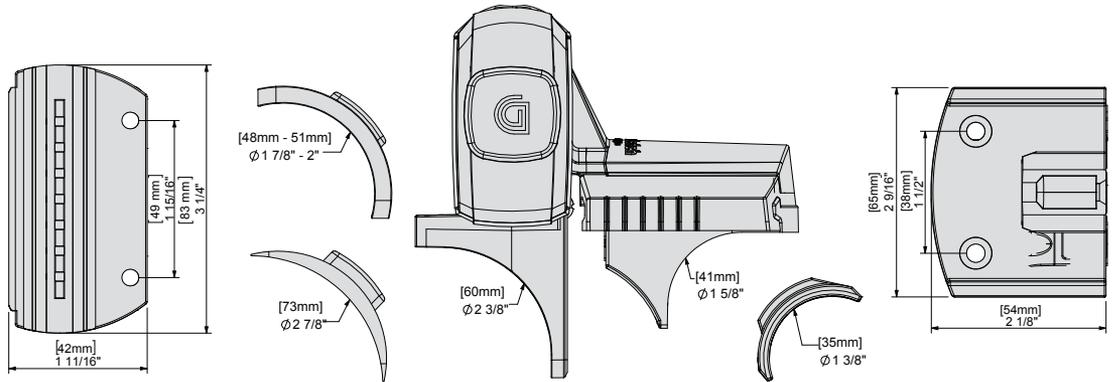


MAGNALatch Side Pull

CODE	COLOR	MODEL - FEATURE	IDEAL GAP	GAP VARIANCE
MLSP2SL	Black	Key Lockable Side Pull	3/8" (10mm)	5/16" - 11/16" (7-17mm)
MLSP2	Black	Side Pull	3/8" (10mm)	5/16" - 11/16" (7-17mm)

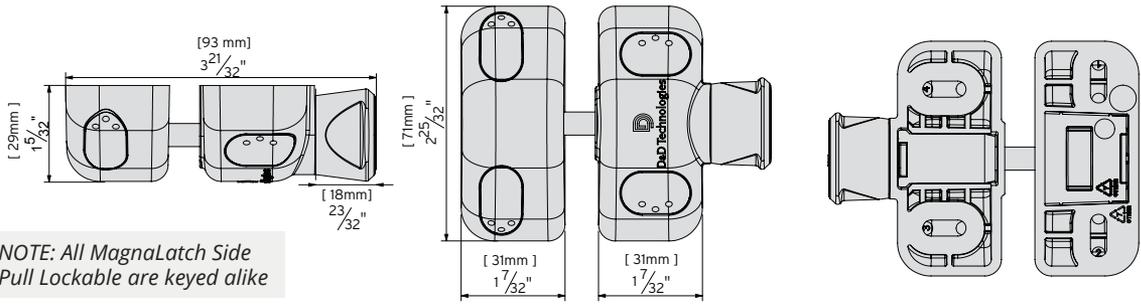

T-Latch

CODE	COLOR	MODEL - FEATURE	IDEAL GAP	GAP VARIANCE
TL01	Black	Padlockable latch	1" (25mm)	3/8" - 1 3/4" (10-45mm)

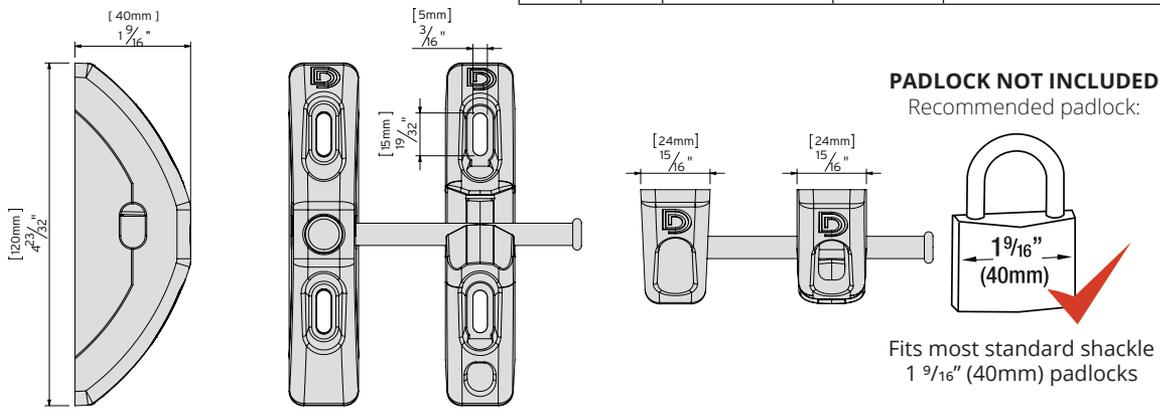

For 2D CAD and CSI Specifications, go to www.ddtechglobal.com

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

Product Dimensions


For 2D CAD and CSI Specifications, go to www.ddtechglobal.com

LOKKLatch® MAGNETIC

Decorative trim covers included: BLACK, BRUSHED or CHROME


CODE	COLOR	TRIM FINISH	IDEAL GAP	GAP VARIANCE
LLM*BT	Black	Black	3/4" (19mm)	3/8" - 1 1/4" (10-32mm)
LLM*CT	Black	Chrome	3/4" (19mm)	3/8" - 1 1/4" (10-32mm)
LLM*ST	Black	Brushed	3/4" (19mm)	3/8" - 1 1/4" (10-32mm)

*NOTE: Insert "A" for keyed alike or "D" for keyed different.

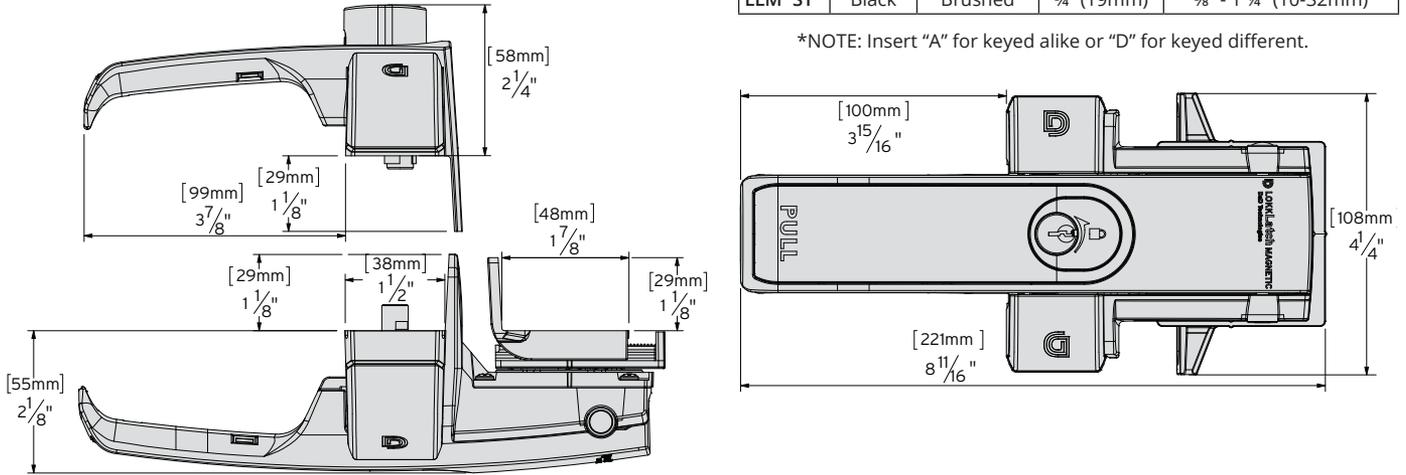

LOKKLatch® DELUXE


CODE	COLOR	KEYED	GATE MATERIAL	IDEAL GAP	GAP VARIANCE
LLDAB	Black, White	Different	Metal, Wood, Vinyl	3/4" (19mm)	5/8" - 1 1/2" (16-38mm)
LLDAB-A	Black, White	Alike	Metal, Wood, Vinyl	3/4" (19mm)	5/8" - 1 1/2" (16-38mm)

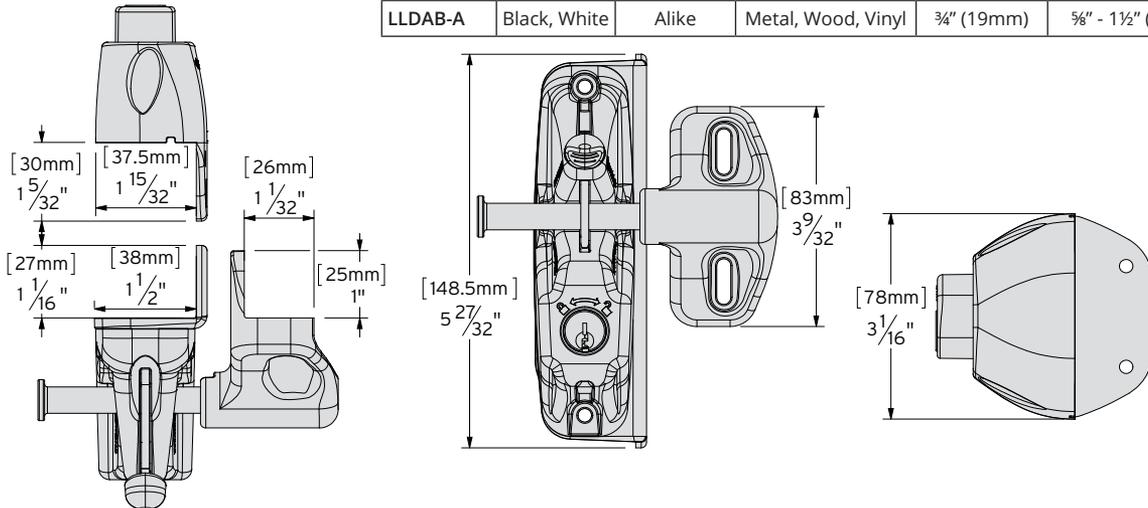

LOKKLatch®

CODE	FEATURE	COLOR	GATE MATERIAL	IDEAL GAP	GAP VARIANCE
LLAA	Latch only	Black, White	Metal, Wood, Vinyl	3/4" (19mm)	3/8" - 1 3/8" (10-35mm)
LLB	EAK only	Black, White	Metal, Wood, Vinyl	-	3/8" - 1 3/8" (10-35mm)
LLAAB	Latch + EAK	Black, White	Metal, Wood, Vinyl	3/4" (19mm)	3/8" - 1 3/8" (10-35mm)
LLABRND	Round Post latch + EAK	Black	Chainlink	1 1/2" (38mm)	1" - 2" (25-50mm)


External Access Kit (LLB)

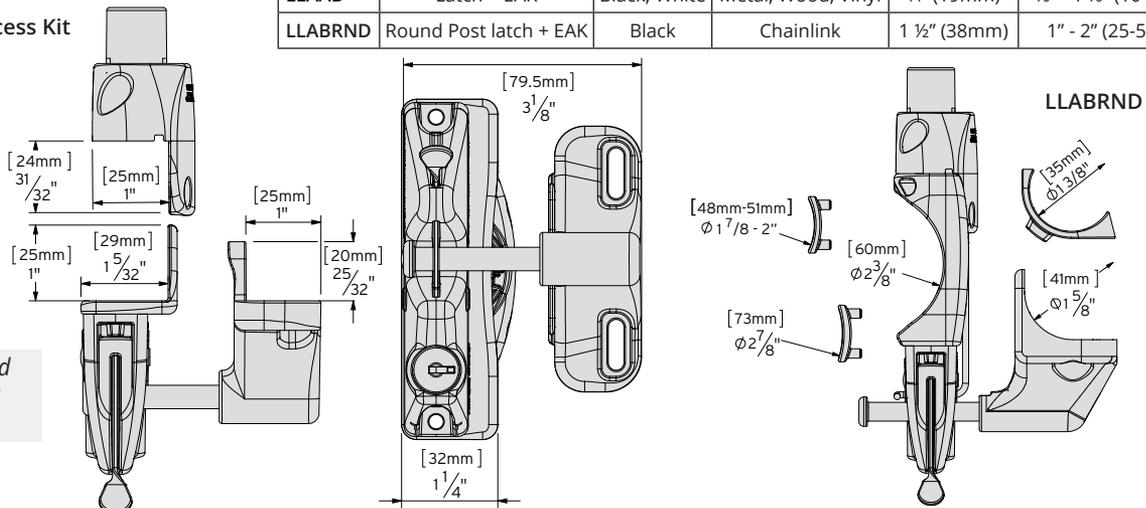




LOKKLatch PRO.SL

CODE	COLOR	KEYED	GATE MATERIAL	IDEAL GAP	GAP VARIANCE
LLP1S	Black, White	Different	Metal, Wood	3/4" (19mm)	5/8" - 1 1/2" (16-38mm)
LLP1S-KSA	Black	Alike	Metal, Wood	3/4" (19mm)	5/8" - 1 1/2" (16-38mm)
LLPS2-K	Black	Different	Vinyl	3/4"(19mm)	5/8" - 1 1/2" (16-38mm)
LLPS2-KSA	Black	Alike	Vinyl	3/4" (19mm)	5/8" - 1 1/2" (16-38mm)

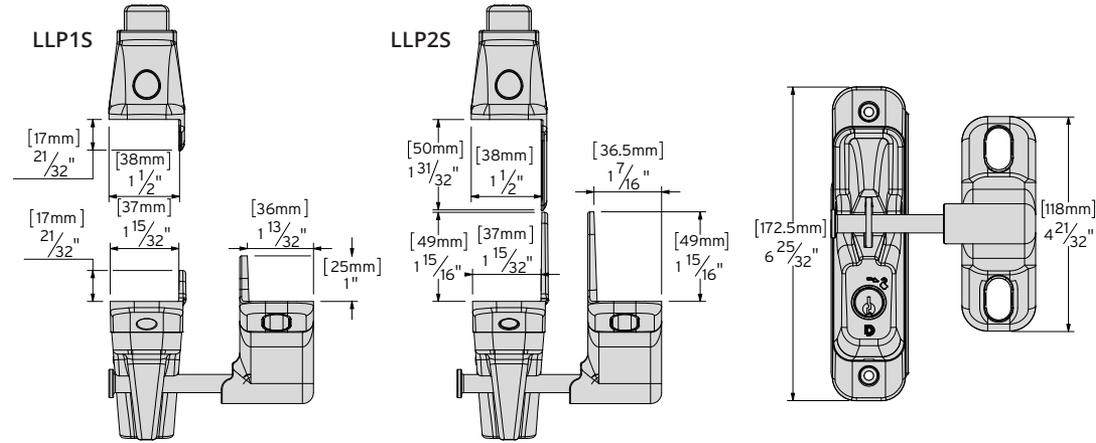

TRUClose REGULAR RANGE

CODE	TRIM FINISH	GATE MATERIAL	SIDE LEGS	IDEAL GAP	GAP VARIANCE	SOLD AS
TCA1S3BT	Black	Metal	-	3/4" (19mm)	1/4" - 7/8" (6-22mm)	1 Pair
TCA1S3CT	Chrome	Metal	-	3/4" (19mm)	1/4" - 7/8" (6-22mm)	1 Pair
TCA1S3ST	Brushed	Metal	-	3/4" (19mm)	1/4" - 7/8" (6-22mm)	1 Pair
TCA1S3WT	White	Metal	-	3/4" (19mm)	1/4" - 7/8" (6-22mm)	1 Pair
TCA1L2S3BT	Black	Metal	2 Legs	Fixed at 3/4" (19mm)	-	1 Pair
TCA1L2S3CT	Chrome	Metal	2 Legs	Fixed at 3/4" (19mm)	-	1 Pair
TCA1L2S3ST	Brushed	Metal	2 Legs	Fixed at 3/4" (19mm)	-	1 Pair
TCA1L2S3WT	White	Metal	2 Legs	Fixed at 3/4" (19mm)	-	1 Pair
TCA2S3BT	Black	Metal/Wood	-	3/4" (19mm)	1/4" - 7/8" (6-22mm)	1 Pair
TCA2L2S3BT	Black	Metal/Wood	2 Legs	Fixed at 3/4" (19mm)	-	1 Pair
TCA3S3BT	Black	Vinyl/Wood	-	3/4" (19mm)	1/4" - 7/8" (6-22mm)	1 Pair
TCA3L2S3BT	Black	Vinyl/Wood	2 Legs	Fixed at 3/4" (19mm)	-	1 Pair
TCA3L2S3WT	White	Vinyl/Wood	2 Legs	Fixed at 3/4" (19mm)	-	1 Pair
TCACAPS3	Black	Safety Cap	-	-	-	1 Each

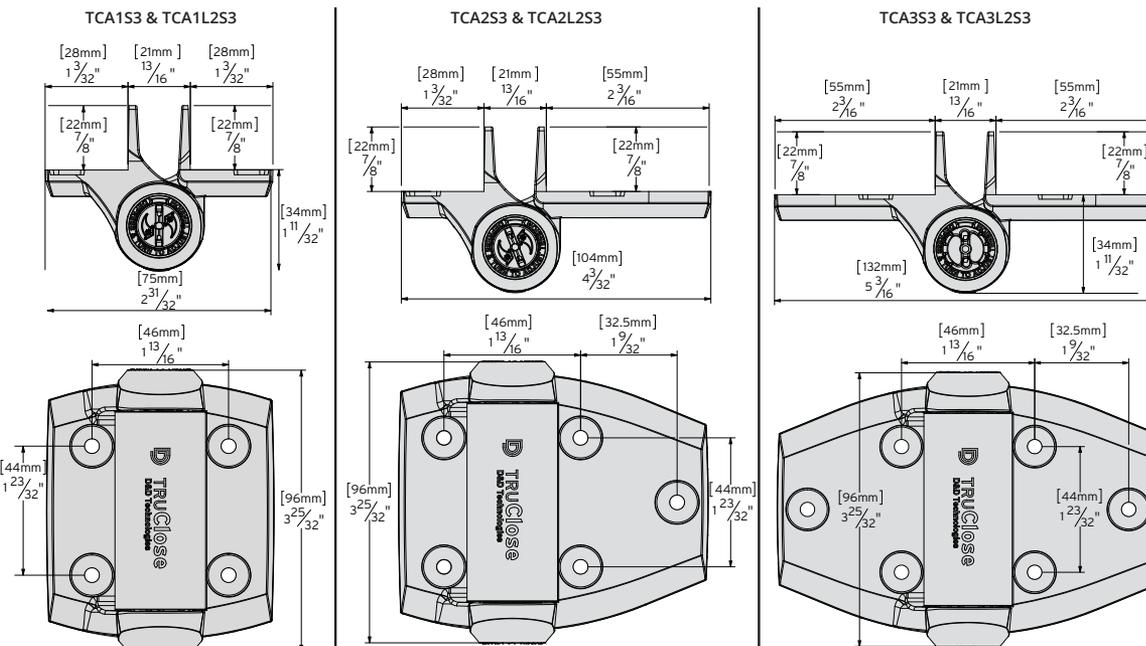

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS


GLASS RANGE

DIMENSIONS


TRUClose® HEAVY DUTY RANGE

CODE	TRIM FINISH	GATE MATERIAL	SIDE LEGS	IDEAL GAP	GAP VARIANCE	SOLD AS
TCHD1AS3BT	Black	Metal	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AS3CT	Chrome	Metal	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AS3ST	Brushed	Metal	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AS3WT	White	Metal	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AL1S3BT	Black	Metal	1 Leg	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1AL2S3CT	Chrome	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD1AL2S3ST	Brushed	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD1AL2S3WT	White	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD1AL2S3BT	Black	Metal	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD1S3BT	Black	Metal/Wood/Vinyl	-	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD1L2S3BT	Black	Metal/Wood/Vinyl	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD2L1S3BT	Black	Vinyl/Wood	1 Leg	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD2L1S3WT	White	Vinyl/Wood	1 Leg	¾" (19mm)	¼" -1" (6-25mm)	1 Pair
TCHD2L2S3BT	Black	Vinyl/Wood	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHD2L2S3WT	White	Vinyl/Wood	2 Legs	Fixed at ¾" (19mm)	-	1 Pair
TCHDCAPS3	Black	Safety Cap	-	-	-	1 Each


TCHD1AS3BT,
TCHD1AL1S3BT, TCHD1AL2S3BT

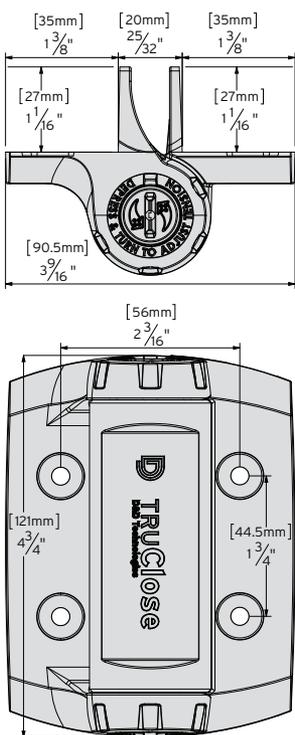


TCHD1S3BT, TCHD1L2S3BT

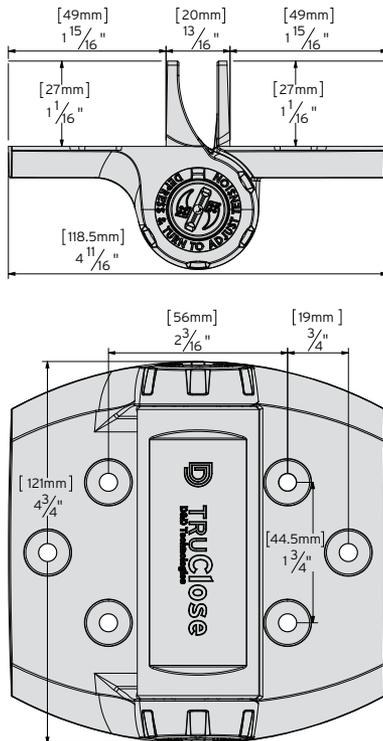


TCHD2LISS3BT, TCHD2L2S3BT

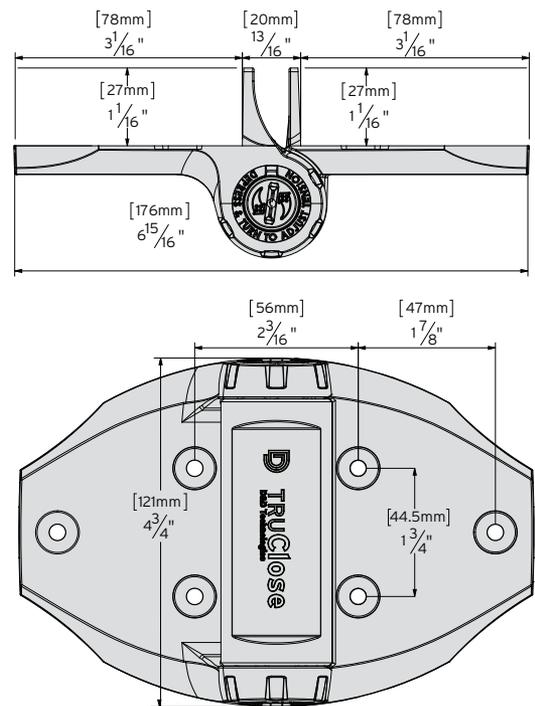

TRUClose® HEAVY DUTY MULTI ADJUST

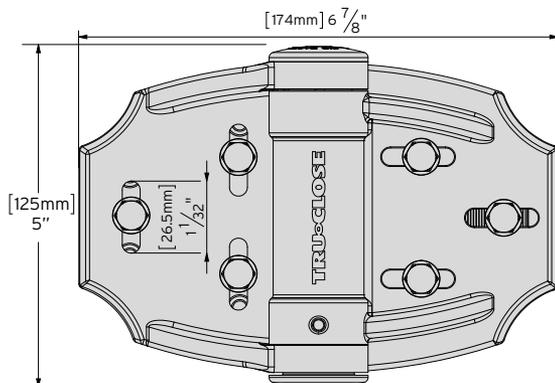

CODE	GATE MATERIAL	IDEAL GATE GAP	GAP VARIANCE	COLOR
TCHDMA1	Wood, Vinyl	1" (25mm)	5/8" - 1 3/8" (16-35mm)	Black
TCHDMA1WT	Wood, Vinyl	1" (25mm)	5/8" - 1 3/8" (16-35mm)	White

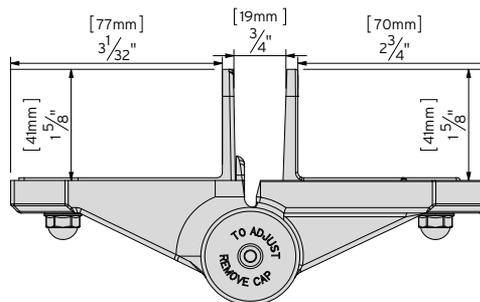






MINIMULTIADJUST™

CODE	GATE MATERIAL	IDEAL GATE GAP	GAP VARIANCE	COLOR
TCAMA1	Metal, Wood, Vinyl	1 1/8" (29mm)	7/8" - 1 1/2" (22-38mm)	Black
TCAMA2	Metal, Wood, Vinyl	1 3/8" (35mm)	7/8" - 2" (22-50mm)	Black
TCAMA2WT	Metal, Wood, Vinyl	1 3/8" (35mm)	7/8" - 2" (22-50mm)	White


ROUND POST

CODE	GATE MATERIAL	IDEAL GATE GAP	GAP VARIANCE	COLOR
TCAMA2RND	Chainlink	1 3/8" (35mm)	7/8" - 2" (22-50mm)	Black

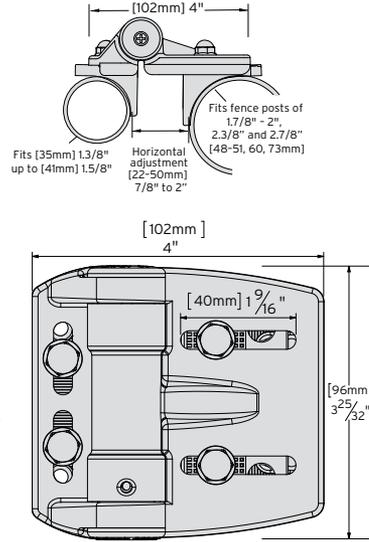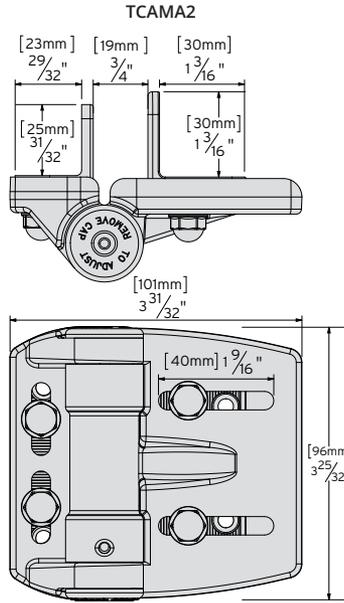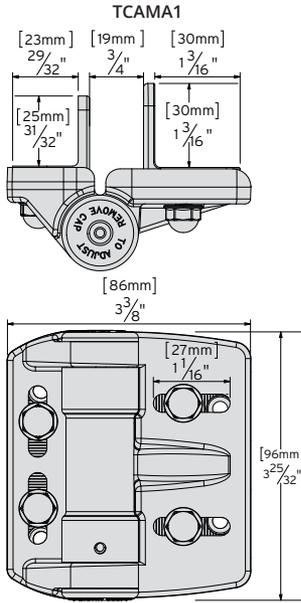


TRUClose® ROUND

CODE	GATE MATERIAL	GAP VARIANCE	COLOR
TCHDRND1-MK2	Chainlink	3/4" - 1 3/8" (19-35mm)	Black
TCHDRND2-MK2	Chainlink	3/4" - 1 3/8" (19-35mm)	Black

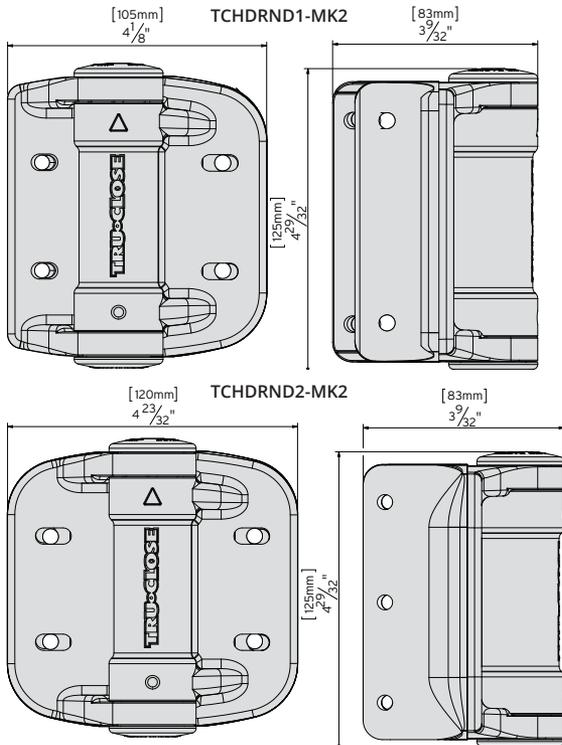

DECOMOLD™

CODE	GATE MATERIAL	GAP VARIANCE	COLOR
TCA4	Wood	3/4" - 1 3/8" (19-35mm)	Black

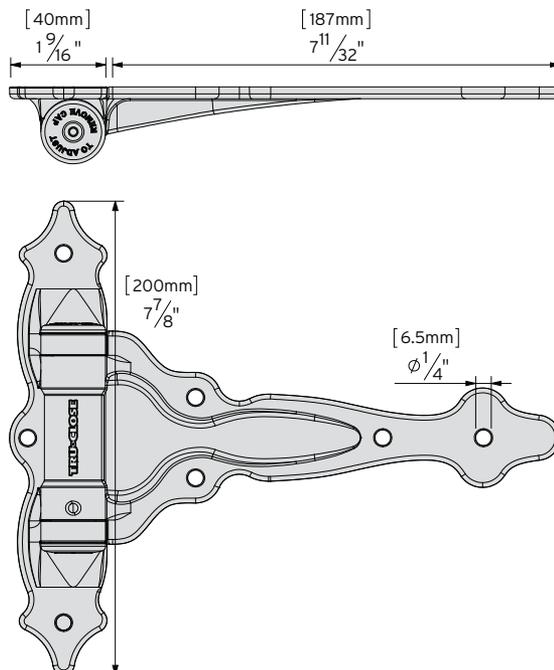

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS

D SUREClose® READYFit Externally Mounted



CODE*	MODEL	TYPE	SELF-CLOSING FROM	MAXIMUM GATE SWING	FINAL SNAP CLOSE ACTION	POOL/CHILD SAFETY**	GAP VARIANCE	FENCE POST SIZE MIN
74001313	RF SM S	Hinge - Aluminum Brackets	-	180°	-	-	½" - 1 ¾" (12-35mm)	2" (50mm)
74001315	RF SM W	Hinge - Steel Brackets	-	180°	-	-	½" - 1 ¾" (12-35mm)	2" (50mm)
74108313	RF 108 S	Hinge/Closer - Aluminum Brackets	85°	180°	Yes	-	½" - 1 ¾" (12-35mm)	2" (50mm)
74108315	RF 108 W	Hinge/Closer - Steel Brackets	85°	180°	Yes	-	½" - 1 ¾" (12-35mm)	2" (50mm)
74108323	RF 108SF S	Hinge/Closer - Safety Feature - Aluminum Brackets	90°	90°	Yes	Yes	½" - 1 ¾" (12-35mm)	2" (50mm)
74108325	RF 108SF W	Hinge/Closer - Safety Feature - Steel Brackets	90°	90°	Yes	Yes	½" - 1 ¾" (12-35mm)	2" (50mm)

*All mounting brackets and fasteners are included with ReadyFit Hinges.

**Use only SF model closers on pool/safety gates. Hinges must be at least 36" (900mm) apart so that they cannot be used as footholds by toddlers.

IMPORTANT: For maximum gate weights, see page 32.

CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.

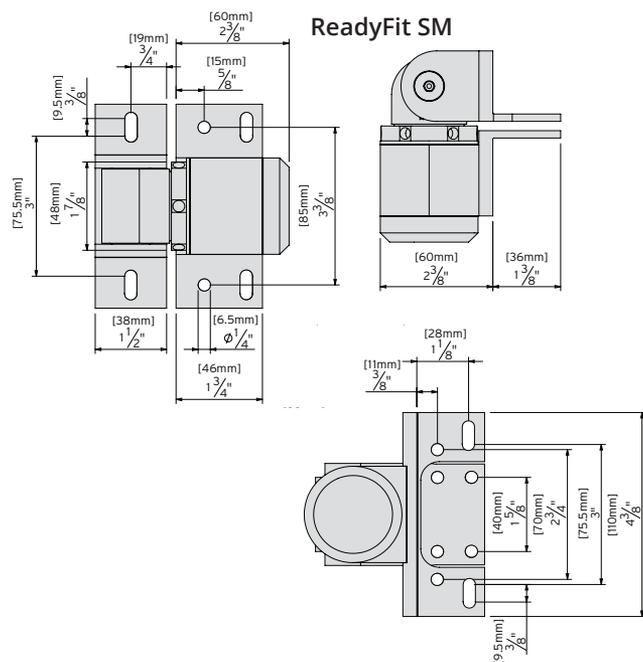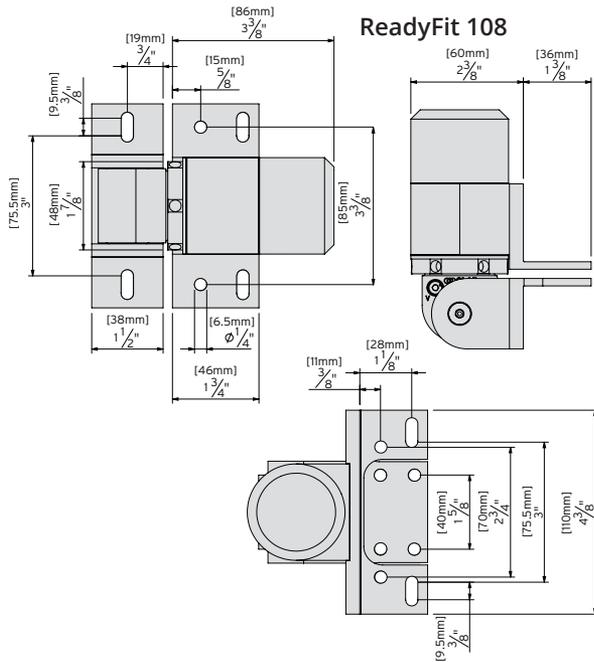


D SUREClose® READYFit

GATE FUNCTION

- Hold-open
Not for safety gates
- Self-closing
Speed adjustable
- Final snap-close action
For electric/coded locks
- Free-swinging

ReadyFit Brackets
Models | Bracket Material
74108325 | Steel
74108323 | Aluminum

SELF-CLOSING - SAFETY (SF Model)
Suitable for child/pool safety*
DO NOT PROP GATE OPEN

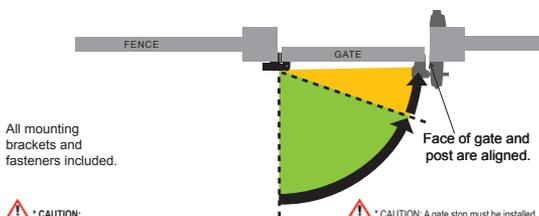


CAUTION:
When used on swimming pool gates, always consult local authorities for swimming pool Codes.

CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.


ReadyFit Brackets
Models | Bracket Material
74108315 | Steel
74108313 | Aluminum

SELF-CLOSING - NON SAFETY
Not suitable for child/pool safety

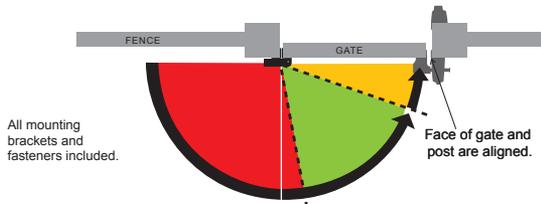

ReadyFit Brackets
Models | Bracket Material
74001315 | Steel
74001313 | Aluminum

NON SELF-CLOSING
Not suitable for child/pool safety

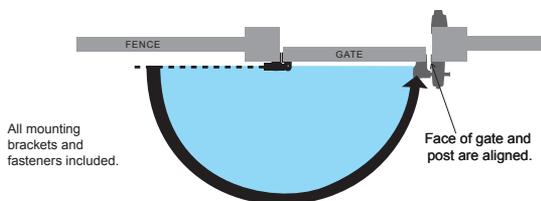

All mounting brackets and fasteners included.

Face of gate and post are aligned.



D SUREClose® Internally Mounted
CENTER MOUNT

CODE*	MODEL	TYPE	HINGE MATERIAL	SELF-CLOSING FROM	MAXIMUM GATE SWING	FINAL SNAP ACTION	POOL/CHILD SAFETY**	GAP VARIANCE	FENCE POST SIZE MINIMUM
75001113	SM S	Hinge	Aluminum (Screw-on)	-	90°	-	-	2 1/2" -3" (64-76mm)	2 1/2" (64mm)
75057113m	57 S	Hydraulic Closer & Hinge	Aluminum (Screw-on)	85°	90°	-	-	2 1/2" -3" (64-76mm)	2 1/2" (64mm)
75057123m	57SF S	Hydraulic Closer & Hinge	Aluminum (Screw-on)	90°	90°	-	Yes	2 1/2" -3" (64-76mm)	2 1/2" (64mm)
75108113m	108 S	Hydraulic Closer & Hinge w/ Final Snap Action	Aluminum (Screw-on)	85°	90°	Yes	-	2 1/2" -3" (64-76mm)	3" (76mm)
75108123m	108SF S	Hydraulic Closer & Hinge w/ Final Snap Action	Aluminum (Screw-on)	90°	90°	Yes	Yes	2 1/2" -3" (64-76mm)	3" (76mm)
75001114	SM W	Hinge	Steel (Weld-on)	-	90°	-	-	2 1/2" -3" (64-76mm)	2 1/2" (64mm)
75057114m	57 W	Hydraulic Closer & Hinge	Steel (Weld-on)	85°	90°	-	-	2 1/2" -3" (64-76mm)	2 1/2" (64mm)
75057124m	57SF W	Hydraulic Closer & Hinge	Steel (Weld-on)	90°	90°	-	Yes	2 1/2" -3" (64-76mm)	2 1/2" (64mm)
75108114m	108 W	Hydraulic Closer & Hinge w/ Final Snap Action	Steel (Weld-on)	85°	90°	Yes	-	2 1/2" -3" (64-76mm)	3" (76mm)
75108124m	108SF W	Hydraulic Closer & Hinge w/ Final Snap Action	Steel (Weld-on)	90°	90°	Yes	Yes	2 1/2" -3" (64-76mm)	3" (76mm)

*Gate mounting brackets included with hinge. Post-mounting brackets sold separately. Fasteners not included.
 **Use only SF model closers on pool/safety gates. Hinges must be at least 36" (900mm) apart so that they cannot be used as footholds by toddlers.
 IMPORTANT: For maximum gate weights, see page 34.
 CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT


GATE EXTRAS

DROP BOLTS


GLASS RANGE

DIMENSIONS


SM S

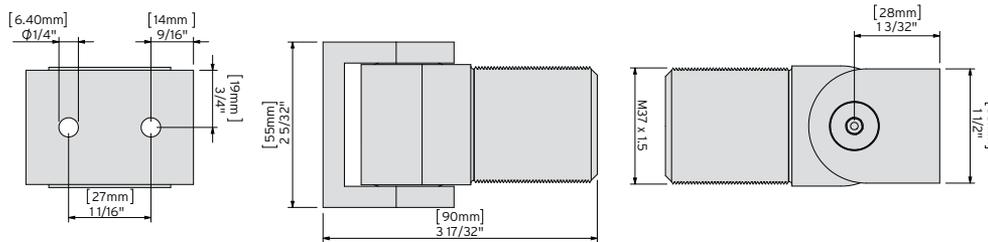

57 S & 57SF S

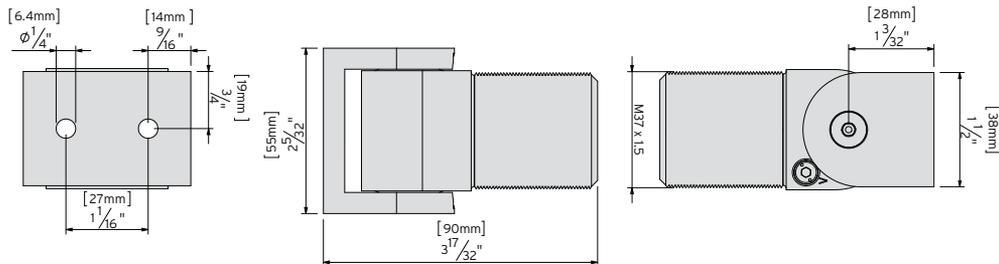

108 S & 108SF S

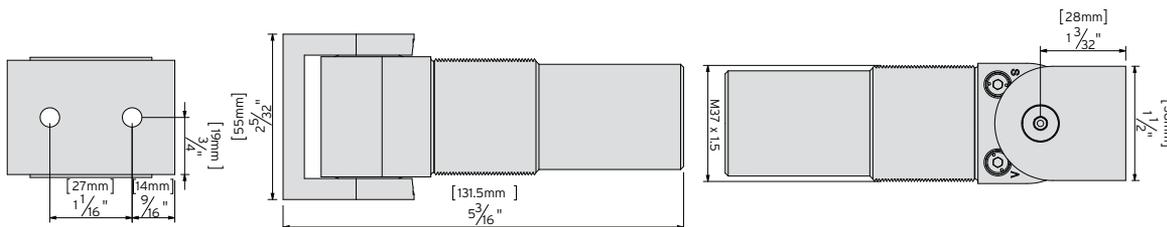



FLUSH MOUNT

CODE*	MODEL	TYPE	HINGE MATERIAL	SELF-CLOSING FROM	MAXIMUM GATE SWING	FINAL SNAP ACTION	POOL/CHILD SAFETY**	GAP VARIANCE	FENCE POST SIZE MIN*
75001213	SM AT90 S	Hinge	Aluminum Screw-on	-	180°	-	-	Fixed ½" (13mm)	2" (50mm)
75057213m	57 AT90 S	Hydraulic Closer & Hinge	Aluminum Screw-on	85°	180°	-	-	Fixed ½" (13mm)	2" (50mm)
75057223m	57SF AT90 S	Hydraulic Closer & Hinge	Aluminum Screw-on	90°	90°	-	Yes	Fixed ½" (13mm)	2" (50mm)
75108213m	108 AT90 S	Hydraulic Closer & Hinge w/ Final Snap Action	Aluminum Screw-on	85°	180°	Yes	-	Fixed ½" (13mm)	3" (76mm)
75108223m	108SF AT90 S	Hydraulic Closer & Hinge w/ Final Snap Action	Aluminum Screw-on	90°	90°	Yes	Yes	Fixed ½" (13mm)	3" (76mm)
75001214	SM AT90 W	Heavy-Duty Hinge	Steel Weld-on	-	180°	-	-	Fixed ½" (13mm)	2" (50mm)
75057214m	57 AT90 W	Hydraulic Closer & Hinge	Steel Weld-on	85°	180°	-	-	Fixed ½" (13mm)	2" (50mm)
75057224m	57SF AT90 W	Hydraulic Closer & Hinge	Steel Weld-on	90°	90°	-	Yes	Fixed ½" (13mm)	2" (50mm)
75108214m	108 AT90 W	Hydraulic Closer & Hinge w/ Final Snap Action	Steel Weld-on	85°	180°	Yes	-	Fixed ½" (13mm)	3" (76mm)
75108224m	108SF AT90 W	Hydraulic Closer & Hinge w/ Final Snap Action	Steel Weld-on	90°	90°	Yes	Yes	Fixed ½" (13mm)	3" (76mm)


*Gate mounting brackets included with hinge. Post mounting brackets sold separately. Fasteners not included.

**Use only SF model closers on pool/safety gates. Hinges must be at least 36" (900mm) apart so that they cannot be used as footholds by toddlers.


IMPORTANT: For maximum gate weights, see page 34.

CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.


SM AT90 S

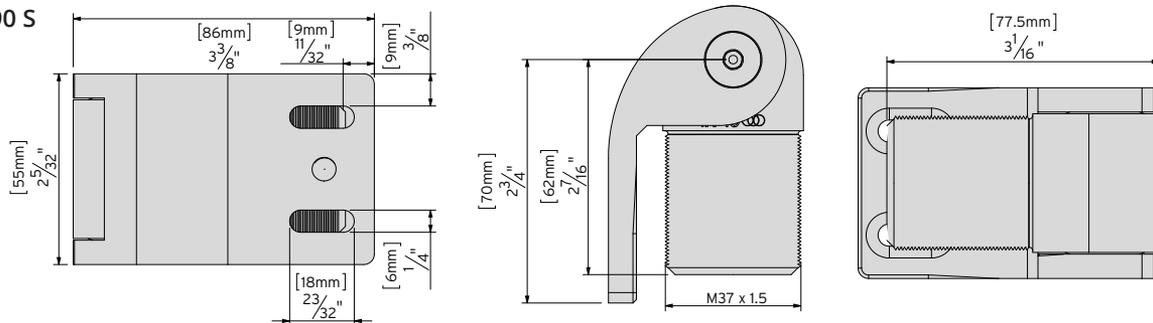

57 AT90 S

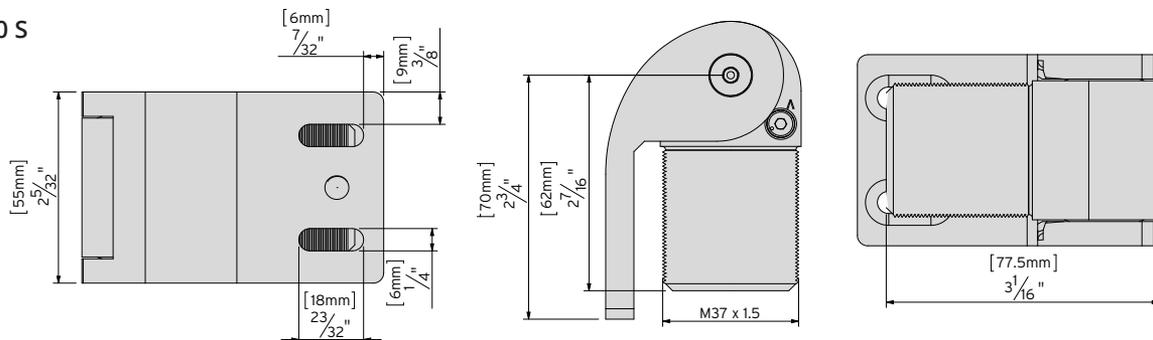

108 AT90 S

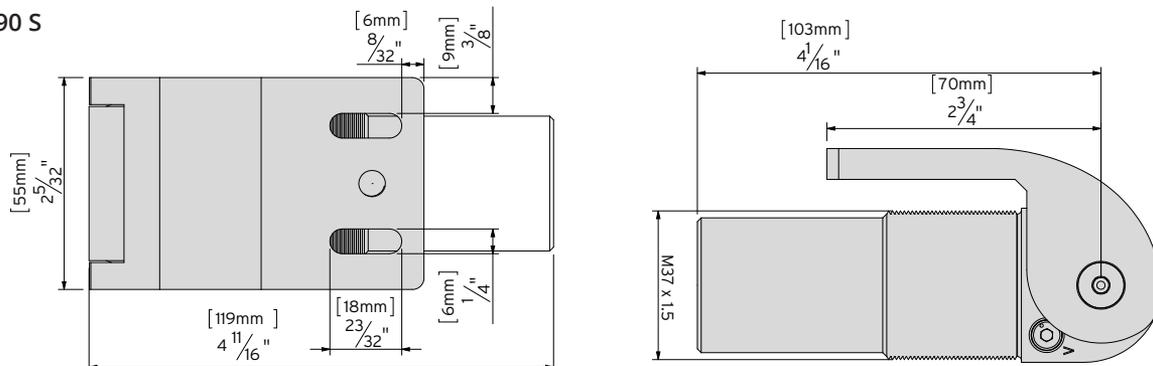



GATE FUNCTION

- Hold-open
Not for safety gates
- Self-closing
Speed adjustable
- Final snap-close action
For electric/coded locks
- Free-swinging

<p>Flush Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75108214</td> <td>Steel</td> </tr> <tr> <td>75108213</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">SELF-CLOSING - NON SAFETY Not suitable for child/pool safety</p> <p>Use post bracket: 7525 Steel 7515 Aluminum</p> <p>Flush Mount: Face of gate and post are aligned.</p>	Models	Bracket Material	75108214	Steel	75108213	Aluminum	<p>Flush Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75108224</td> <td>Steel</td> </tr> <tr> <td>75108223</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">SELF-CLOSING - SAFETY (SF Model) Suitable for child/pool safety* DO NOT PROP GATE OPEN</p> <p>Use post bracket: 7525 (W) 7515 Aluminum</p> <p>Flush Mount: Face of gate and post are aligned.</p> <p><small>⚠️ CAUTION: When used on swimming pool gates, always consult local authorities for swimming pool Codes.</small></p> <p><small>⚠️ CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.</small></p>	Models	Bracket Material	75108224	Steel	75108223	Aluminum
Models	Bracket Material												
75108214	Steel												
75108213	Aluminum												
Models	Bracket Material												
75108224	Steel												
75108223	Aluminum												
<p>Center Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75108114</td> <td>Steel</td> </tr> <tr> <td>75108113</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">SELF-CLOSING - NON SAFETY Not suitable for child/pool safety</p> <p>Use post bracket: 7526 Steel 7511 Aluminum 7512 Aluminum 7513 Aluminum 7514 Aluminum</p> <p>Center Mount: Center of gate and post are aligned.</p>	Models	Bracket Material	75108114	Steel	75108113	Aluminum	<p>Center Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75108124</td> <td>Steel</td> </tr> <tr> <td>75108123</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">SELF-CLOSING - SAFETY (SF Model) Suitable for child/pool safety* DO NOT PROP GATE OPEN</p> <p>Use post bracket: 7526 Steel 7511 Aluminum 7512 Aluminum 7513 Aluminum 7514 Aluminum</p> <p>Center Mount: Center of gate and post are aligned.</p> <p><small>⚠️ CAUTION: When used on swimming pool gates, always consult local authorities for swimming pool Codes.</small></p> <p><small>⚠️ CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.</small></p>	Models	Bracket Material	75108124	Steel	75108123	Aluminum
Models	Bracket Material												
75108114	Steel												
75108113	Aluminum												
Models	Bracket Material												
75108124	Steel												
75108123	Aluminum												
<p>Flush Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75057214</td> <td>Steel</td> </tr> <tr> <td>75057213</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">SELF-CLOSING - NON SAFETY Not suitable for child/pool safety</p> <p>Use post bracket: 7525 Steel 7515 Aluminum</p> <p>Flush Mount: Face of gate and post are aligned.</p>	Models	Bracket Material	75057214	Steel	75057213	Aluminum	<p>Flush Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75057224</td> <td>Steel</td> </tr> <tr> <td>75057223</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">SELF-CLOSING - SAFETY (SF Model) Suitable for child/pool safety* DO NOT PROP GATE OPEN</p> <p>Use post bracket: 7525 Steel 7515 Aluminum</p> <p>Flush Mount: Face of gate and post are aligned.</p> <p><small>⚠️ CAUTION: When used on swimming pool gates, always consult local authorities for swimming pool Codes.</small></p> <p><small>⚠️ CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.</small></p>	Models	Bracket Material	75057224	Steel	75057223	Aluminum
Models	Bracket Material												
75057214	Steel												
75057213	Aluminum												
Models	Bracket Material												
75057224	Steel												
75057223	Aluminum												
<p>Center Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75057114</td> <td>Steel</td> </tr> <tr> <td>75057113</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">SELF-CLOSING - NON SAFETY Not suitable for child/pool safety</p> <p>Use post bracket: 7526 Steel 7511 Aluminum 7512 Aluminum 7513 Aluminum 7514 Aluminum</p> <p>Center Mount: Center of gate and post are aligned.</p>	Models	Bracket Material	75057114	Steel	75057113	Aluminum	<p>Center Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75057124</td> <td>Steel</td> </tr> <tr> <td>75057123</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">SELF-CLOSING - SAFETY (SF Model) Suitable for child/pool safety* DO NOT PROP GATE OPEN</p> <p>Use post bracket: 7526 Steel 7511 Aluminum 7512 Aluminum 7513 Aluminum 7514 Aluminum</p> <p>Center Mount: Center of gate and post are aligned.</p> <p><small>⚠️ CAUTION: When used on swimming pool gates, always consult local authorities for swimming pool Codes.</small></p> <p><small>⚠️ CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.</small></p>	Models	Bracket Material	75057124	Steel	75057123	Aluminum
Models	Bracket Material												
75057114	Steel												
75057113	Aluminum												
Models	Bracket Material												
75057124	Steel												
75057123	Aluminum												
<p>Flush Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75001214</td> <td>Steel</td> </tr> <tr> <td>75001213</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">NON SELF-CLOSING</p> <p>Use post bracket: 7525 Steel 7515 Aluminum</p> <p>Flush Mount: Face of gate and post are aligned</p>	Models	Bracket Material	75001214	Steel	75001213	Aluminum	<p>Center Mount Brackets</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Models</th> <th style="width: 50%;">Bracket Material</th> </tr> </thead> <tbody> <tr> <td>75001114</td> <td>Steel</td> </tr> <tr> <td>75001113</td> <td>Aluminum</td> </tr> </tbody> </table> <p style="text-align: center;">NON SELF-CLOSING</p> <p>Use post bracket: 7526 Steel 7511 Aluminum 7512 Aluminum 7513 Aluminum 7514 Aluminum</p> <p>Center Mount: Center of gate and post are aligned</p>	Models	Bracket Material	75001114	Steel	75001113	Aluminum
Models	Bracket Material												
75001214	Steel												
75001213	Aluminum												
Models	Bracket Material												
75001114	Steel												
75001113	Aluminum												

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS





D SUREClose® EASY

CODE*	MODEL	TYPE	SELF-CLOSING FROM	MAXIMUM GATE SWING	FINAL SNAP ACTION	POOL/CHILD SAFETY**	GAP VARIANCE	FENCE POST SIZE MIN.
72108423	SCE 108SF S	Hinge - Aluminum Brackets	90°	90°	Yes	Yes	2" - 4" (50-100mm)	2" (50mm)

*All EASY closers include fasteners, gate and post-mounting brackets.

**Yes (SF) = Gate will not hold open at 90° (OK for safety gates). Do NOT use a hinge with a 90° hold-open feature (-) for pool/child safety gates. Hinges must be at least 36" (900mm) apart so that they cannot be used as footholds by toddlers. IMPORTANT: For maximum gate weights, see weight chart on page 37.

CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.

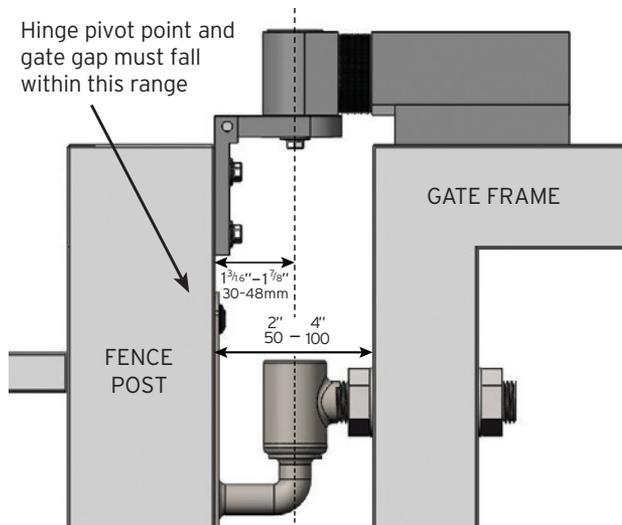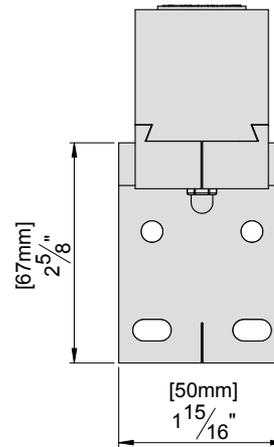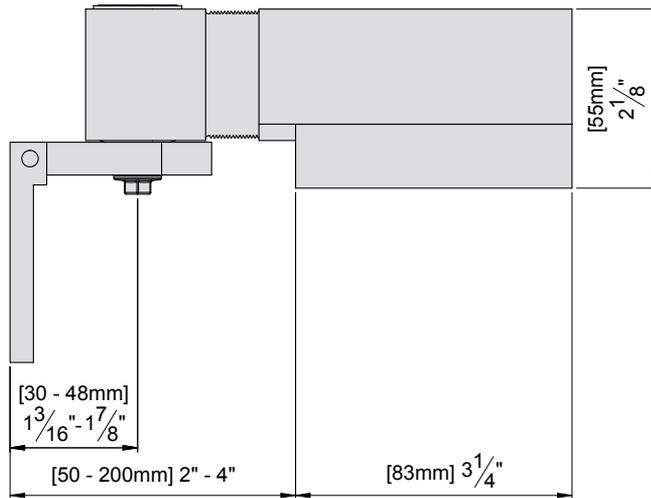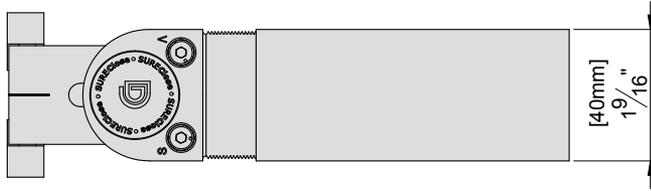

GATE FUNCTION

- Final snap-close action
For electric/coded locks
- Self-closing
Speed adjustable

EASY Hinge-Closer		SELF-CLOSING - SAFETY (SF Model)
Models	Bracket Material	Suitable for child/pool safety*
72108423	Aluminum	DO NOT PROP GATE OPEN
Mounting Brackets & Fasteners included		Center Mounted: Center of gate and post are aligned.








*** CAUTION:** When used on swimming pool gates, always consult local authorities for swimming pool Codes.

*** CAUTION:** A gate stop must be installed when using SF models. Gate must not be allowed to open past 90°. Doing so voids warranty.



Post Mounting Brackets for Flush and Center Mount models

CODE*	TYPE	MODEL - FEATURE	MOUNT TYPE	MAX GATE SWING	HORIZONTAL ADJUSTMENT	GAP VARIANCE	FENCE POST SIZE MIN.
7511	6026-01	Aluminum	Center	90°	Yes	2 ½" -3" (64-76mm)	2 ½" (64mm)
7512	6026-02	Aluminum	Center	90°	Yes	2 ½" -3" (64-76mm)	2 ½" (64mm)
7513	6026-03	Aluminum	Center	90°	Yes	2 ½" -3" (64-76mm)	4" (102mm)
7514	6026-04	Aluminum with Side Fixing Clamp	Center	90°	-	2 ½" (64mm)	2 ½" (64mm)
7515	6026-05	Aluminum	Flush	180°	-	½" (13mm)	2" (50mm)
7525	0510-04	Steel	Flush	180°	-	½" (13mm)	2" (50mm)
7526	0510-05	Steel	Center	90°	Yes	2 ½" -3" (64-76mm)	2 ½" (64mm)

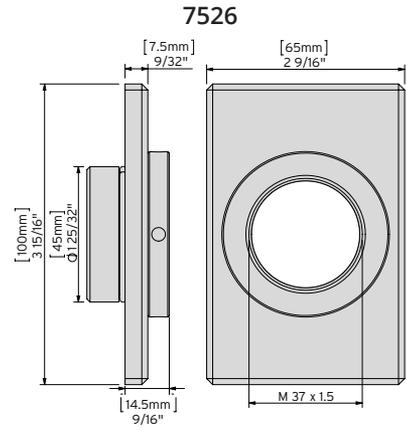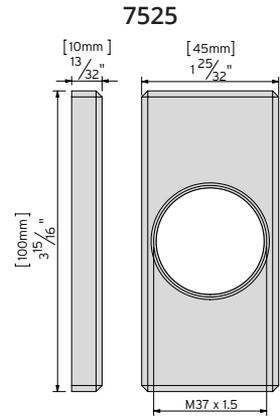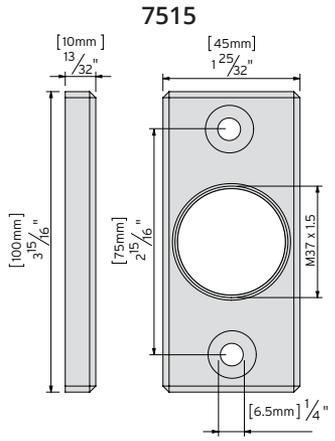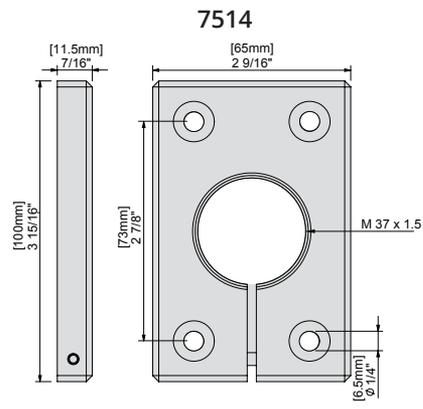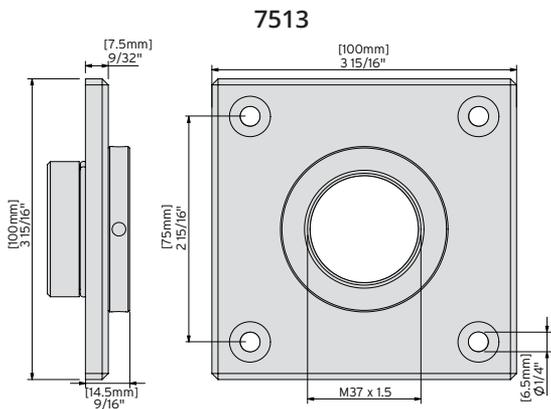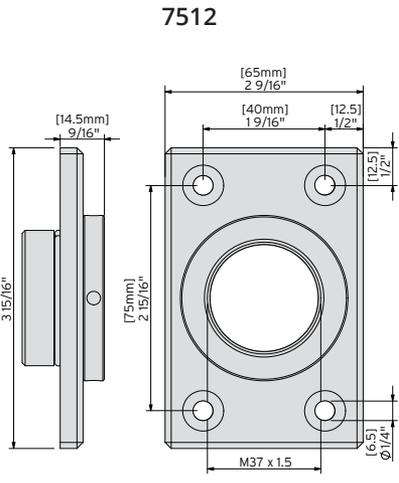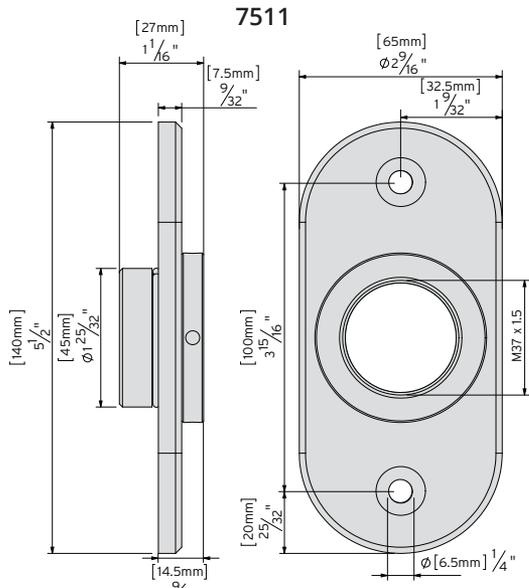

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS


DROP BOLTS

GLASS RANGE

DIMENSIONS

D[®] KWIKFit™ ALUMINUM


KF3A - Wall or post mount

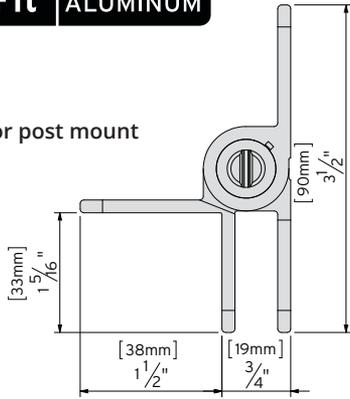



CODE	COLOR	MODEL/FEATURE	GAP VARIANCE
KF3ABL	Black	Wall or post mounted	Fixed at 3/4" (19mm)
KF3ABR	Bronze	Wall or post mounted	Fixed at 3/4" (19mm)
KF3AWT	White	Wall or post mounted	Fixed at 3/4" (19mm)
KF3BL	Black	Alignment ridges	Fixed at 1/2" (13mm)
KF3BR	Bronze	Alignment ridges	Fixed at 1/2" (13mm)
KF3WT	White	Alignment ridges	Fixed at 1/2" (13mm)
KF3L2BL	Black	2 Side fixing legs	Fixed at 1/2" (13mm)
KF3L2BR	Bronze	2 Side fixing legs	Fixed at 1/2" (13mm)
KF3L2WT	White	2 Side fixing legs	Fixed at 1/2" (13mm)

NOTE: KwikFit Aluminum hinges are sold as single hinges. For pairs and other kitting options, please contact your D&D sales representative.

KF3 - Post mount

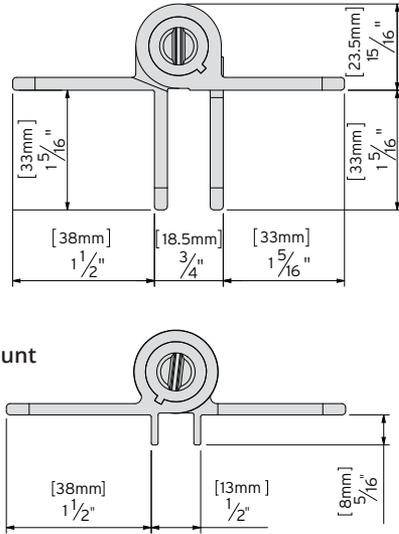


KF3L2 - Post mount

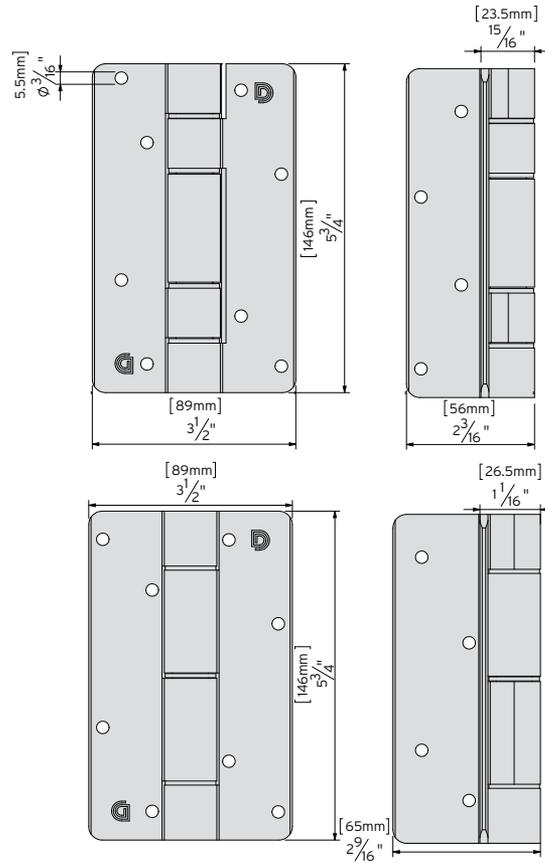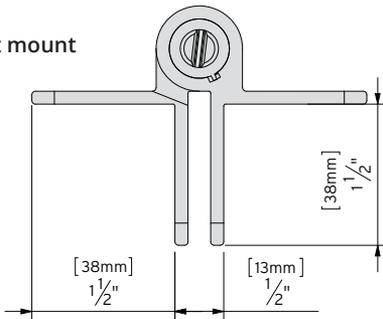

D[®] KWIKFit™ POLYMER



CODE	COLOR	MODEL/FEATURE	GATE GAP	GATE MATERIAL
KFP	Black	Plain pivoting - No spring	Fixed at 3/4" (19mm)	Metal, Wood, Vinyl
KFS	Black	Self-closing - fixed tension	Fixed at 3/4" (19mm)	Metal, Wood, Vinyl

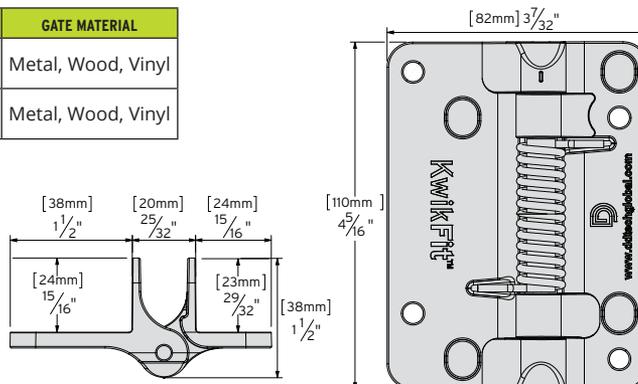



D GATEStop™

CODE	COLOR	GATE MATERIAL
TCGS1	Black, White	Wood, Vinyl
TCGS2	Black	Metal, Wood, Vinyl
TCGS3	Black	Metal

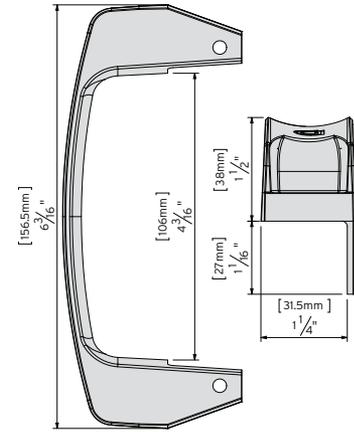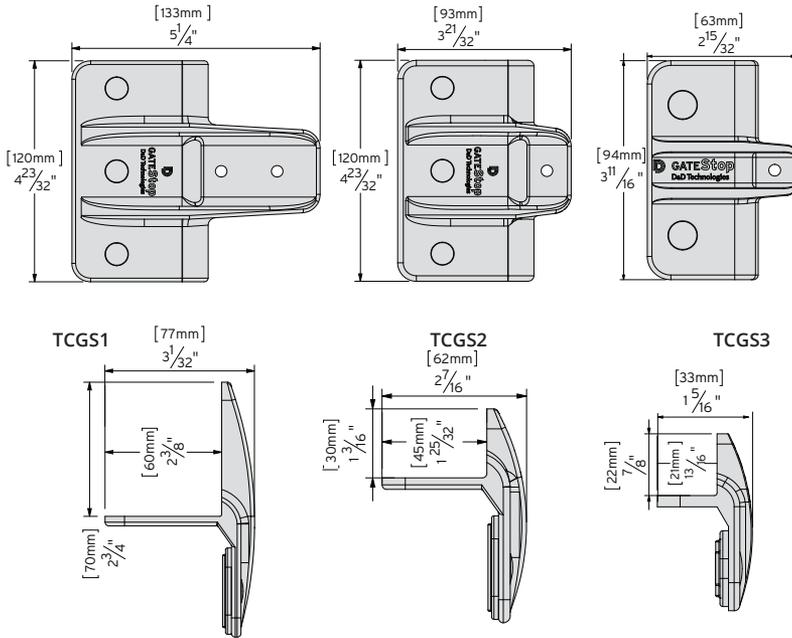


D GATEHandle™

CODE	COLOR	GATE MATERIAL
LL3GH	Black	Metal, Wood, Vinyl


D LOKKBolt™

CODE	COLOR	GATE MATERIAL	BOLT LENGTH
LB118BX	Black, White	Metal	18" (450mm)
LB124BX	Black, White	Wood, Vinyl	24" (610mm)
LB218BX	Black	Metal	18" (450mm)
LB224BX	Black	Wood, Vinyl	24" (610mm)
LBBPGB	Black	Optional Base Plate	-

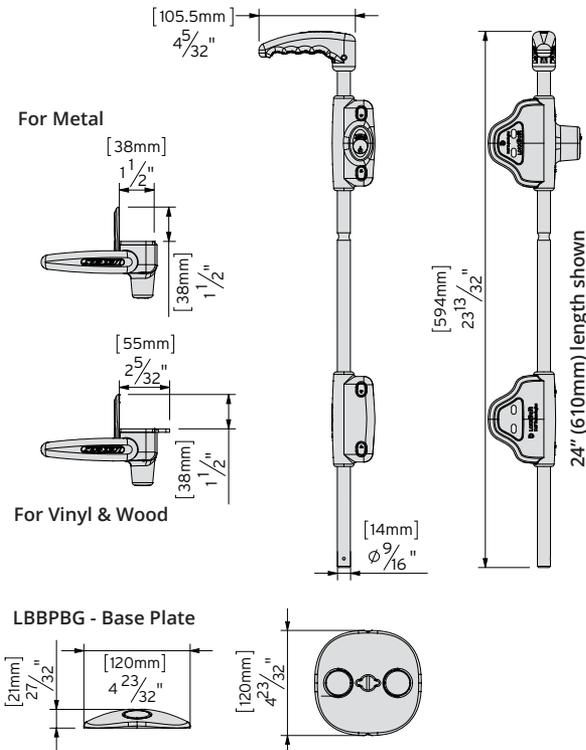

D q-Bolt™

CODE	COLOR	GATE MATERIAL	BOLT LENGTH
QB124	Black	Metal	24" (610mm)
QB224	Black	Wood, Vinyl	24" (610mm)
QB140	Black	Metal	40" (1020mm)
QB240	Black	Wood, Vinyl	40" (1020mm)

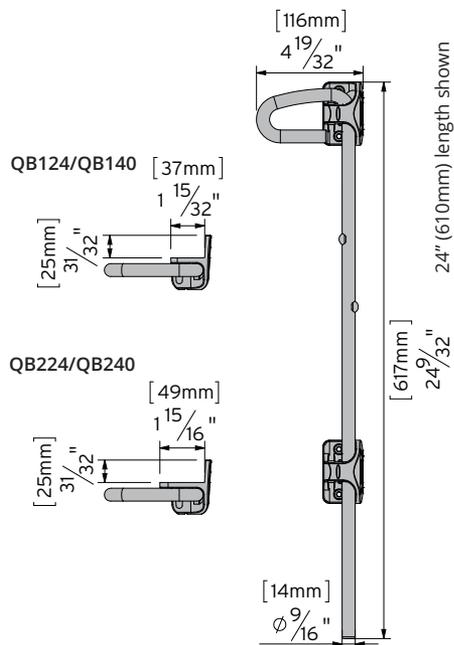

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS


GLASS RANGE

DIMENSIONS

D MAGNALatch™ Gate latch for glass gates

CODE	COLOR	MODEL - FEATURE	APPLICATION
MLSPS2LGHK	Black	Lockable Glass Kit	Fits 5/16" - 3/8" (8-10mm) glass
MLSPS2GHK	Black	Glass Kit	Fits 5/16" - 3/8" (8-10mm) glass

Fits 2" (50mm) round posts to frameless glass gates.

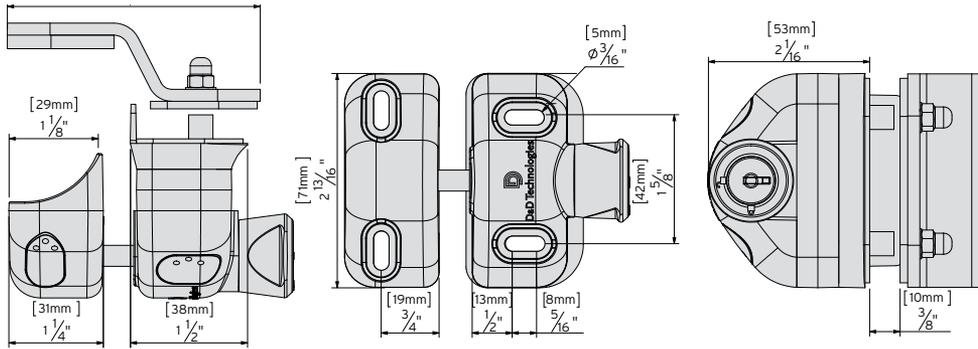


NOTE: Gate Stops available in Silver Pearl, Black and Mill finishes. Contact your D&D sales representative for more detail.

Vizage™ Side Pull


CODE	FINISH	MODEL - FEATURE
MLSPS2VPSS	Polished	316 marine-grade stainless
MLSPS2VBSS	Brushed	316 marine-grade stainless

The Vizage stainless steel gates latches are non-locking. Contact D&D Technologies for glass mounting brackets.

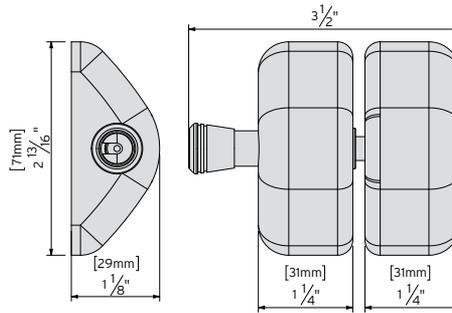


Vizage™ Stainless steel mounting brackets for glass gates

CODE	APPLICATION	MATERIAL	FINISH - TRIM/PLATES
MLSPG90SS	90° square post-to-glass	316-grade stainless steel	Brushed, Polished

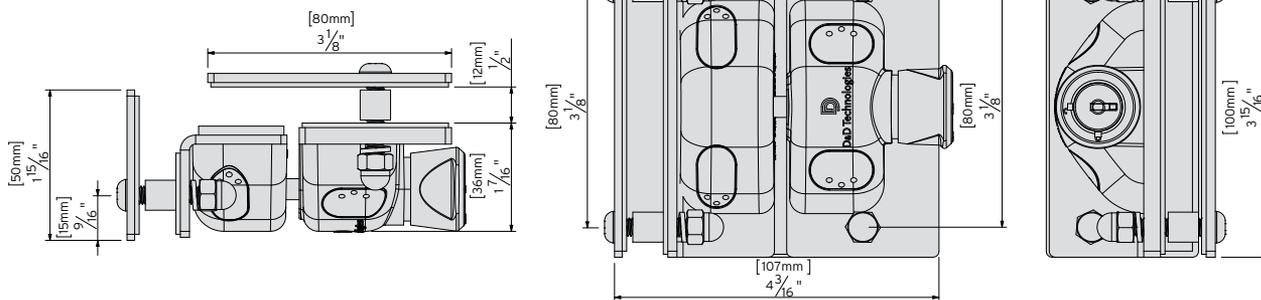

CODE	APPLICATION	MATERIAL	FINISH - TRIM/PLATES
MLSPG180SS	180° glass-to-glass	316-grade stainless steel	Brushed, Polished

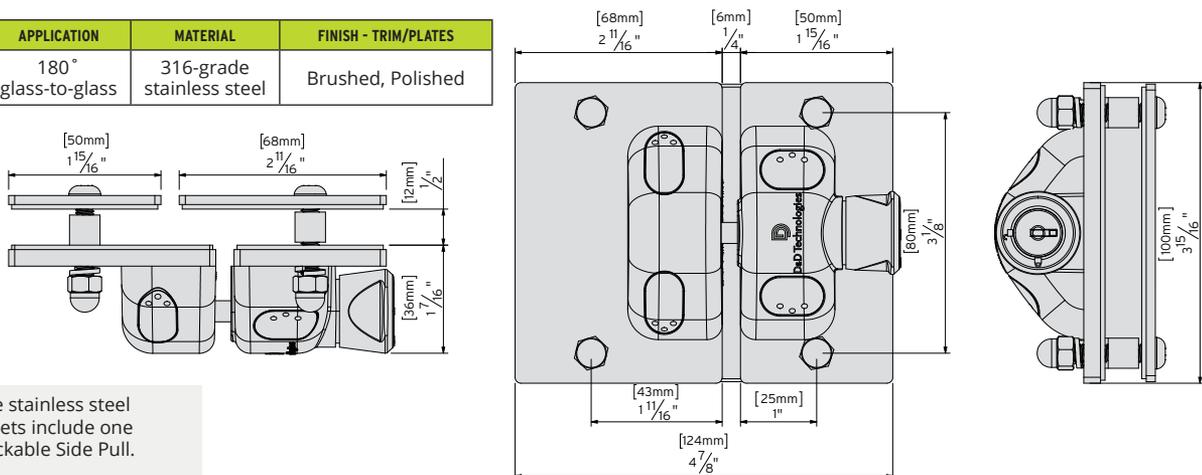


NOTE: All Vizage stainless steel mounting brackets include one MagnaLatch Lockable Side Pull.




Vizage™ Stainless steel mounting brackets for glass gates

CODE	APPLICATION	MATERIAL	FINISH - TRIM/PLATES
MLSPWPMSS	Glass to Wall or Post	316-grade Stainless Steel	Brushed, Polished

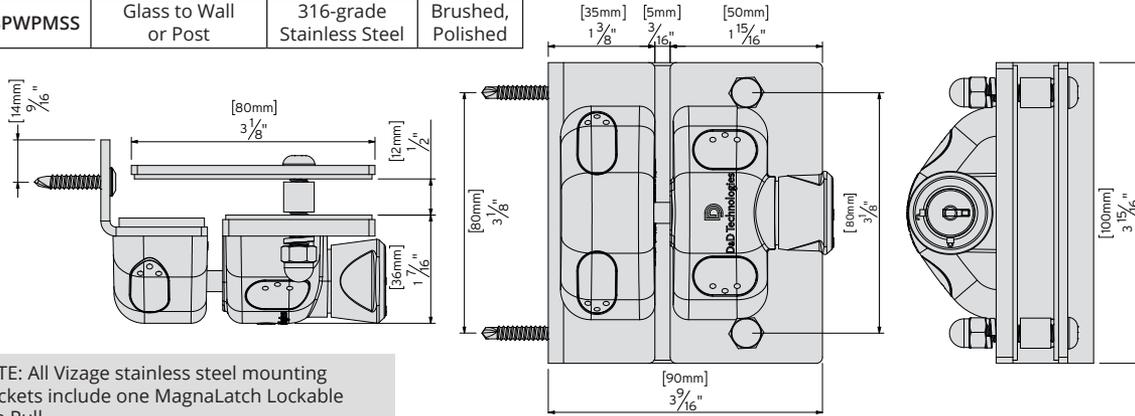

NOTE: All Vizage stainless steel mounting brackets include one Magnalatch Lockable Side Pull.


CODE	APPLICATION	MATERIAL	FINISH - TRIM/PLATES
MLSPRNDMSS	Glass to Round Post	316-grade Stainless Steel	Brushed, Polished

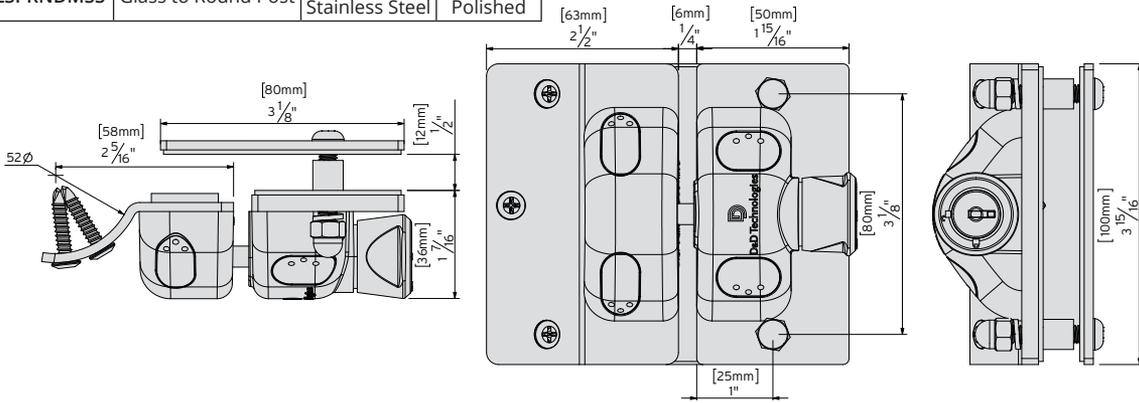

Vizage™ Gate Hinge for glass gates

CODE	APPLICATION	MATERIAL	FINISH - TRIM/PLATES
TCAV1-BSS	Fits 5/16" - 3/8" (6-8mm) glass	Brushed	Brushed, Polished
TCAV1-PSS	Fits 5/16" - 3/8" (6-8mm) glass	Polymer	Brushed, Polished

Fits 2" (50mm) round posts to frameless glass gates.

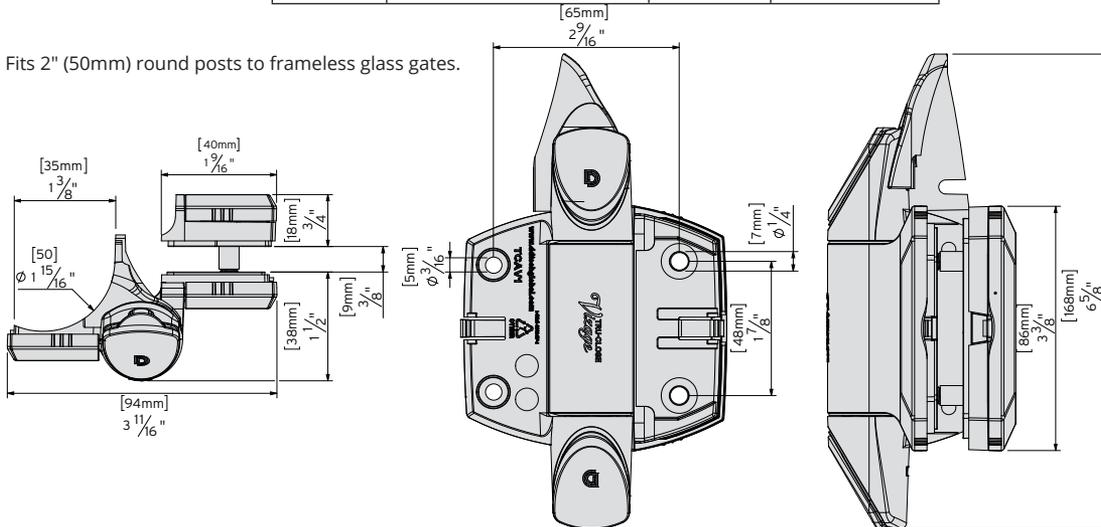

For additional product information please contact us or visit us online at www.ddtechglobal.com

SELECTION GUIDE

MAGNALATCH

T-LATCH

LOKKLATCH

TRUCLOSE

SURECLOSE

KWIKFIT

GATE EXTRAS

DROP BOLTS

GLASS RANGE

DIMENSIONS



D&D Technologies

World's most trusted gate hardware

AUSTRALIA:

D&D Technologies P/L, Unit 6, 4-6 Aquatic Drive,
Frenchs Forest NSW 2086
Tel: 1800 500 203 or (02) 9454 7888 Fax: (02) 9454 7688.
E-mail: sales@ddtech.com.au

NORTH & SOUTH AMERICA:

D&D Technologies (USA) Inc., 7731 Woodwind Drive,
Huntington Beach CA 92647
Tel: (800) 716-0888 Fax: (800) 464-6400
Tel: (714) 677-1300 Fax: (714) 677-1299
E-mail: info@ddtechusa.com

EUROPE:

D&D Technologies B.V., Vondellaan Niasstraat 1
3531 WR Utrecht, The Netherlands
Tel: +31 (0)30 291 98 47 Fax: +31 (0)30 291 99 98
E-mail: sales@ddtech.nl

UK:

D&D Technologies, Charlwoods Road,
East Grinstead, West Sussex RH19 2HR
Tel: +44 (0) 1342 327280 Fax: +44 (0) 1342 327115
Email: enquiries@ddtechglobal.co.uk



The world's most trusted gate hardware



AVAILABLE FROM